

HSF RoHS Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

temperature range: 40–100 °C



Ordering Information

6P14S-21 XX XX XX X XXX X 1 A

No. of Pins Per Row	Contact	Plating	Insulator Material	Length of Terminal	Packing
2	50"	60-Gold Flash	B: P661	B: Tape & Reel + CAP	A: PE Bag
		G=1u" Gold	C: P691	C: Tube	D: Tube + CAP
		G=3u" Gold	D: LCP	E: Tray	F: Tape & Reel
		G=10u" Gold			
		G=15u" Gold			
		G=30u" Gold			
		P0-Gold Flash			
		F=1U" Gold/Tin			
		F=3U" Gold/Tin			
		F=5U" Gold/Tin			
		F=10U" Gold/Tin			
		F=15U" Gold/Tin			
		F=30U" Gold/Tin			
		S=6Tin			
		S=12 Matte Tin			

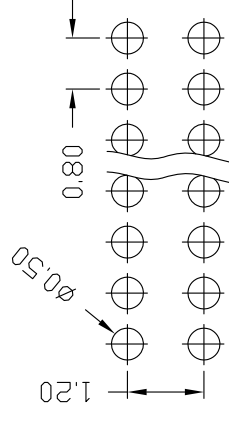

Recommended P. C. B layout

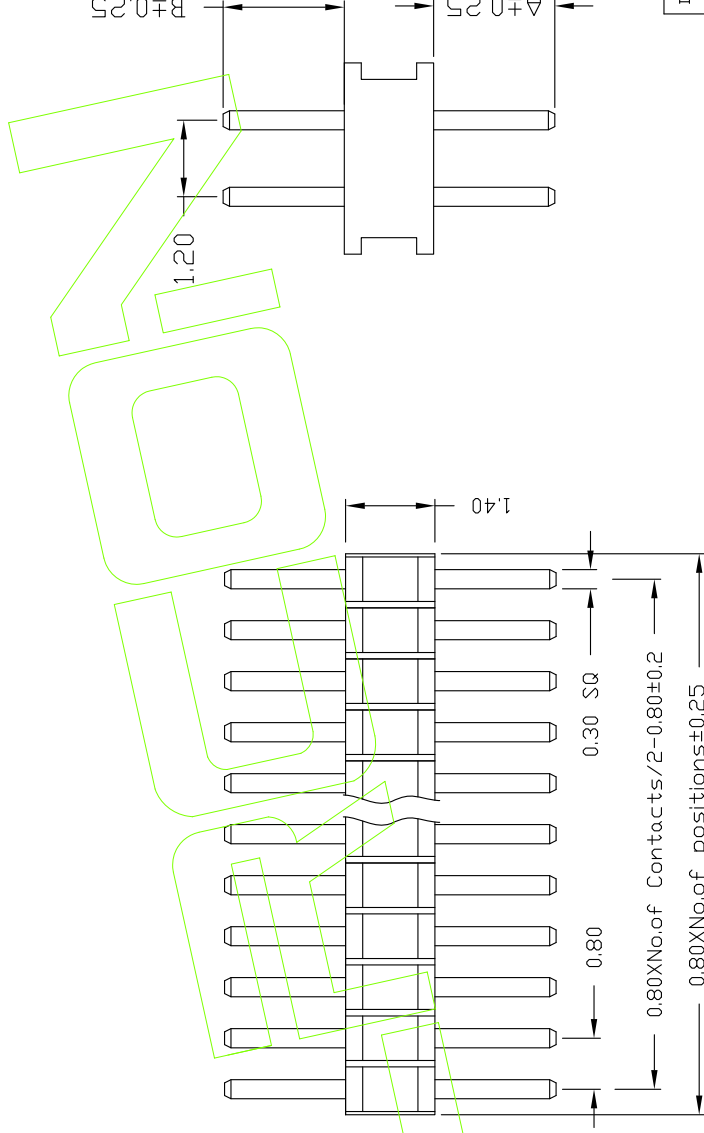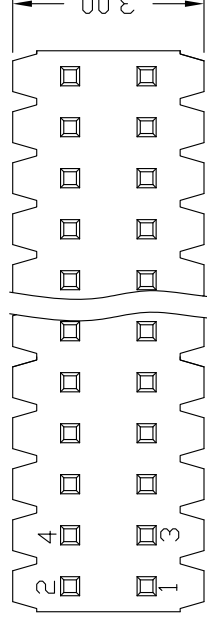

Dimension antitheses list	
ITEM	A B
Standard	2.5 2.8
Alternate	

[illegible]