

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T+30%G.F UL94V-0, Color: Black

Contact : Brass

额定电流: 3 AMP

接触阻抗: $20\text{ m}\Omega$

绝缘阻抗: 1000 M Ω min.



耐电压: AC 500V

温度范围: -40°C to +105°C



Ordering Information

3P43M-21 XX XX XXX X 1 Δ_{A1}

No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
2-40*	G ^o -Gold Flash	B-PMG	F: Tape & Reel + CAP	A: PE Bag
	G ^o -Au Gold	C-PMI	C: Tube	D: Tube
	G ^o -Sn Gold	D-LCP	D: Tube+CAP	E: Tray
	G ^o -In Gold		F: Tape & Reel	
	G ^o -5u Gold			
	G ^o -30u Gold			
	P0-Gold Flash			
	F1=1u/Gold/Tin			
	F4=3u/Gold/Tin			
	F9=5u/Gold/Tin			
	F6=10u/Gold/Tin			
	F7=15u/Gold/Tin			
	F9=30u/Gold/Tin			
	Sr=1in			
	Sh= Matte Tin			

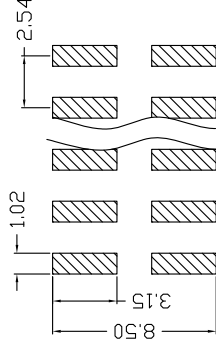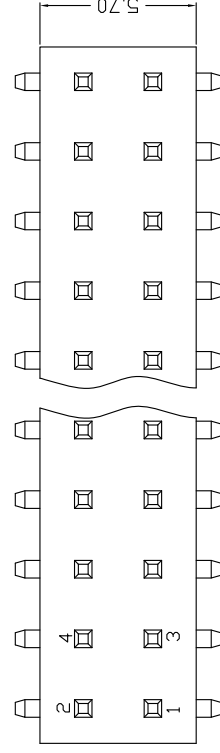

Recommended P.C.B layout

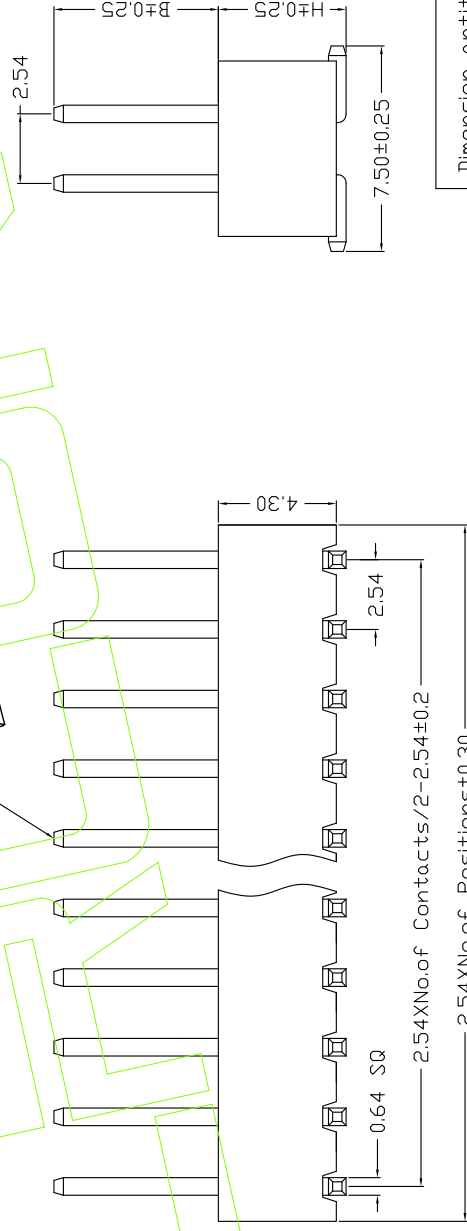

Dimension antitheses list					
ITEM	H	B			
Standard	5.0	3.0	4.0	5.0	6.0
Alternate					

[illegible]