

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact : Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ

绝缘阻抗: 1000 MΩ min

Insulating Resistance: 10

耐电压: AC 500V





Withstanding Voltage: AC

温度范围: -40°C to $+105^{\circ}\text{C}$


Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

3P74R-21 XX XX XXX X

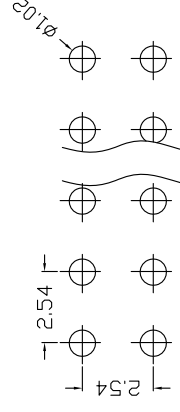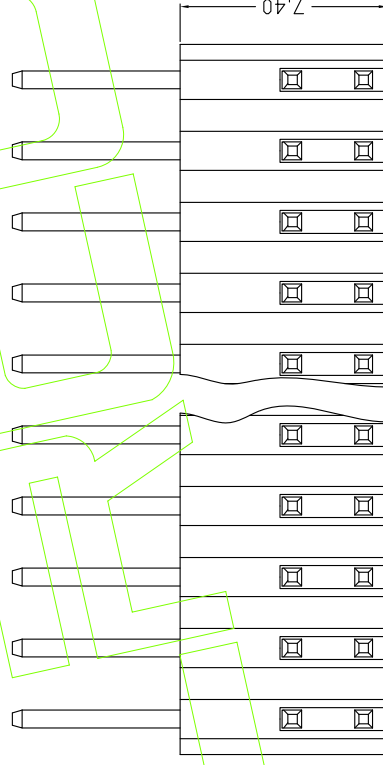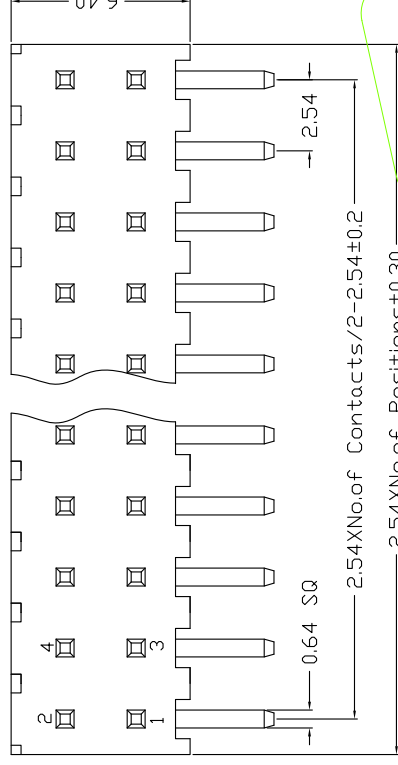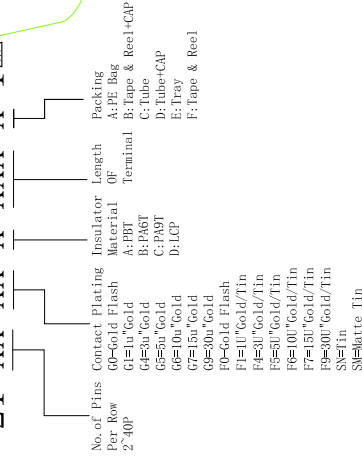

Recommended P. C. B layout

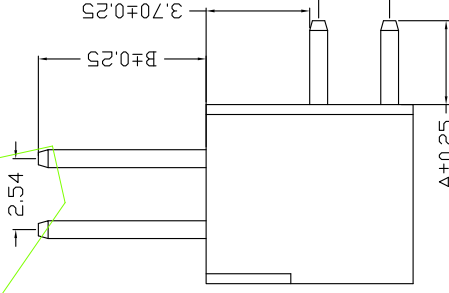

Dimension antitheses list				
ITEM	A		B	
Standard	3.0		3.0	4.0
Alternate				
			5.0	6.0

						LIANR	20/06/09	SCALE	Fit	LARCON Lrcon Electronics Co.,Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	X.XX ± 0.25	DRAWN	Kang Tao		SHEET 1 / 1	CHECK	PART NO.	
A0	12/05/18	NEW	———	X.XXX Angle ± 3°	CHECKED	罗荣军		PROJ. ———	TITLE:		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TOL	方里军			APPROVE	Customer No.	2.54双排针 塑高7.4 90度