

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: LCP+30%G.F UL94V-0, Color: Black

四方针：黄铜

Material : Brass

2. 特性 (characteristics):

额定电流: 7 AMP

额定电压: 7 AMV
Rating Current: 7 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

絕緣抵抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ

耐电压: AC 500V.

耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Computer image: 40101020


Ordering Information

7P32S- 11 XX XX X XXX X 1 Δ_{A1}

No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
1-20P	Gold/Gold Flash	E:PMI	A:PE Bag	A:PE Bag
	G=30 Gold	C:PMI	C:Tube	B:tape & Reel+CAP
	G=30 Gold	D:LCF	E:Tray	C:Tube
	G=00 Gold		F:tape & Reel	E:Tray
	G=150 Gold			F:tape & Reel
	G=300 Gold			
	P0-Gold Flash			
	F=1U Gold/Tin			
	F=30 Gold/Tin			
	F=30 Gold/Tin			
	F=100 Gold/Tin			
	F=150 Gold/Tin			
	F=300 Gold/Tin			
	Sh=1in			
	Sh=Matte Tin			

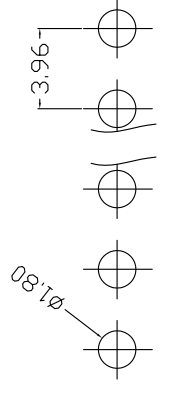

Recommended P. C. B. layout

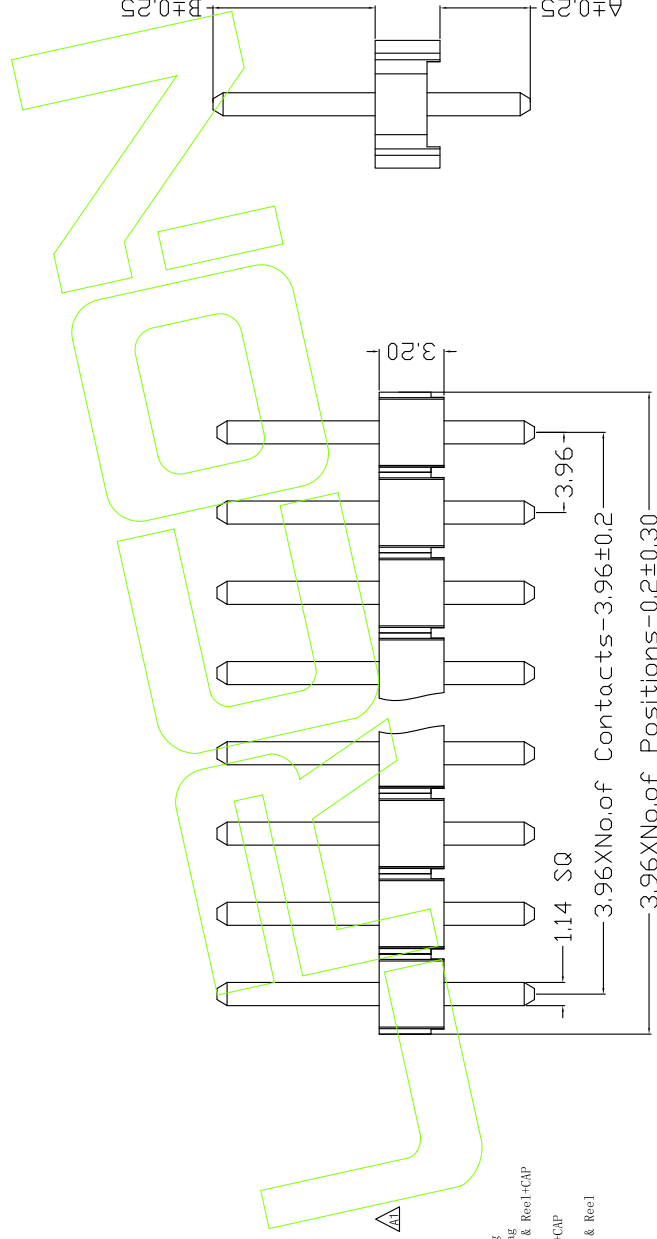

ITEM	A	B
Standard	3.50	8.00
Alternate		

[illegible]