

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

Contact : Brass

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接觸阻抗: 20 mΩ MAX

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V

耐电压: AC 500V.
Withstanding Voltage: AC 500V.


温度范围: -40°C 到 $+105^{\circ}\text{C}$

温度范围: -40°C to $+105^{\circ}\text{C}$


Ordering Information

7P32S-12 XX XX XXX X 2₄

No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
1-20P	60-gold Flash	E: PBT	A: PE Bag	A: PE Bag
	G=3u Gold	E: PBT	B: tape & Reel + CAP	B: tape & Reel + CAP
	G=3u Gold	C: PBT	C: tube	C: tube
	G=3u Gold	D: LCP	D: tube	D: tube
	G=0u Gold		E: Tray	E: Tray
	G=15u Gold		F: tape & Reel	F: tape & Reel
	G=30u Gold			
	P0-gold Flash			
	F=1U Gold/Tin			
	F=3U Gold/Tin			
	F=5U Gold/Tin			
	F=6U Gold/Tin			
	F=15U Gold/Tin			
	F=30U Gold/Tin			
	Silver Tin			
	Silver Tin			

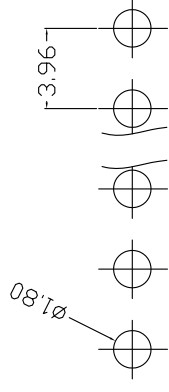

Recommended P.C.B layout

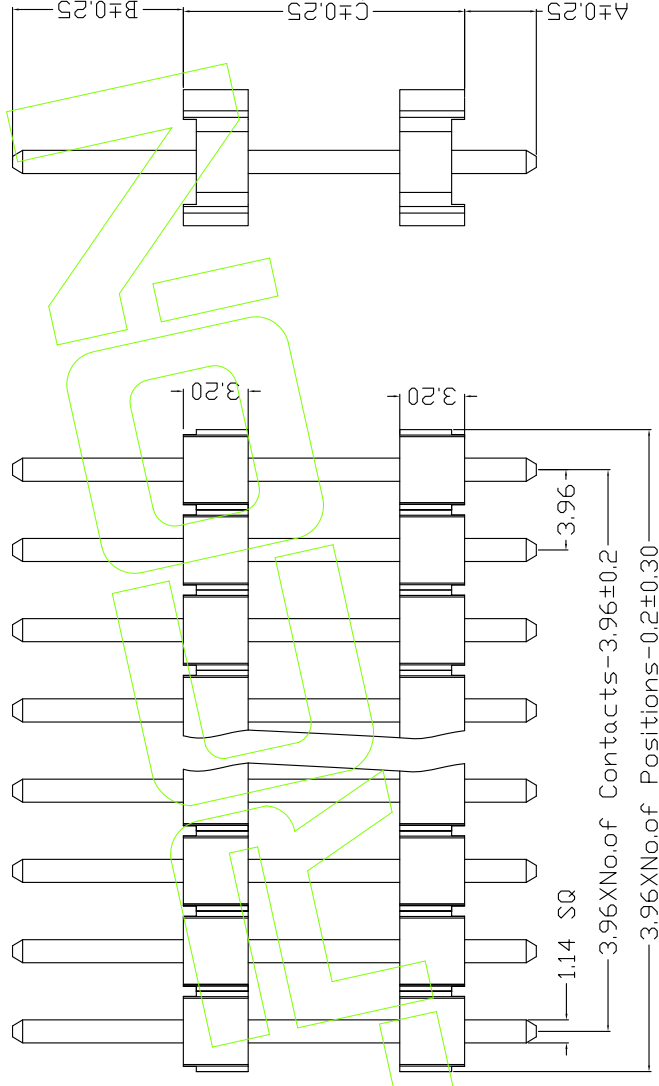

Users can customize
此高度可定制

Dimension antitheses list			
ITEM	A	B	C
Standard	3.50	8.00	
Alternate			

[illegible]