

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%GF 1194V-0, 颜色: 黑色

Material : Brass

额定电压: 3 AMP

Routing: call center: 3 AMM
培鍾阳拉: 20 30 MAY

CONDUCT RESISTANCE: 20
44.44 1000 MO max





Insulating Resistance: 10
科中E AC 500V

Withstanding voltage: AC 500V.


Temperature Range: -40°C to +105°C

Ordering Information

3P25L-22 XX XX XXX X 3 Δ_{A1}^1

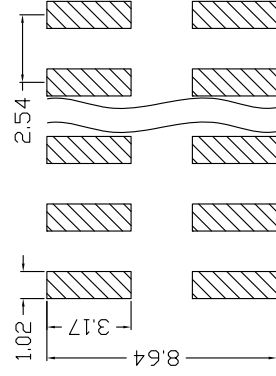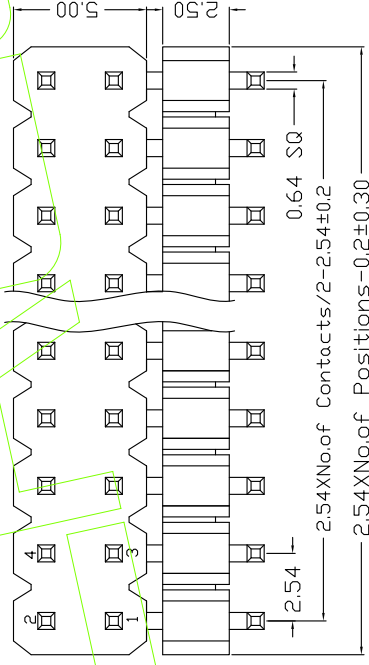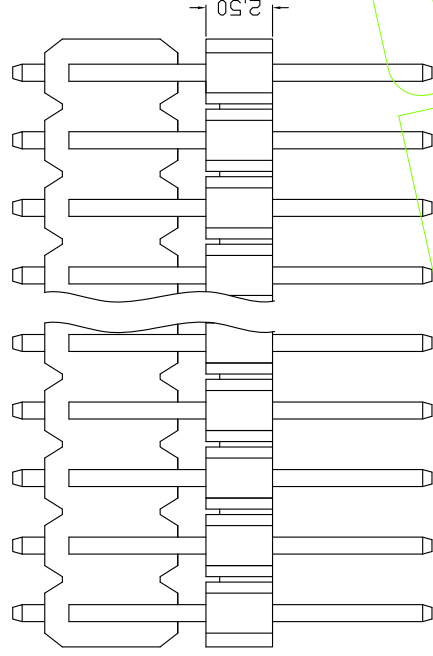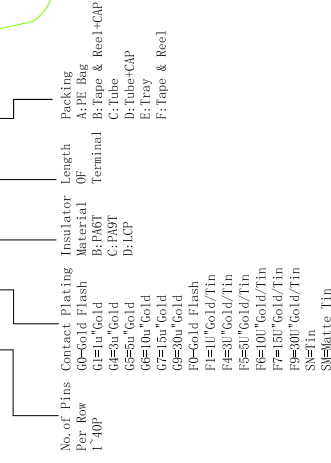

Recommended P.C.B layout

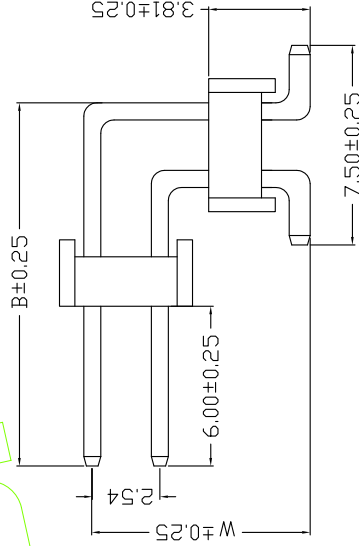

Dimension antitheses list		
ITEM	W	B
Standard	8.19	13.5
Alternate		

					OPERATION	DRAW	LIANR	20/06/09	SCALE	Fit	连润电子有限公司 Lrcon Electronics Co.,Ltd	
					X.X				UNIT	MM		
					X.XX	张涛			A4	DESIGN		
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ_1		X.XXX				SIZE	CHECK	PART NO.	3P25L-22XXXXXXXXXX3
A0	12/05/18	NEW			Angle				SHEET	1/1	TITLE:	2.54双排针 双塑 塑高2.5 90度SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		Customer No.	