

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F. UL94V-0, Color: Black

四方针：黄铜

Material : Brass

2. 特性 (characteristics):

额定电流: 3 AMP

额定电流: 3 AMP
Current Rating: 3 AMP.

接觸阻抗: 20 mΩ MAX

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ min.
耐电压: AC 500V



耐电压: AC 500V.
Withstanding Voltage: AC 500V.

Withstanding voltage: AC 500V.
温度范围: -40°C to +105°C


温度范围: -40°C to $+105^{\circ}\text{C}$
Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Ordering Information

3p257-11 XX XX X XXX X 3^{A1}

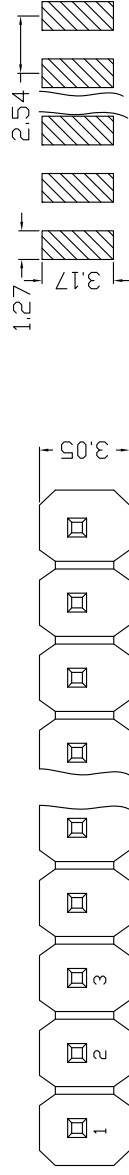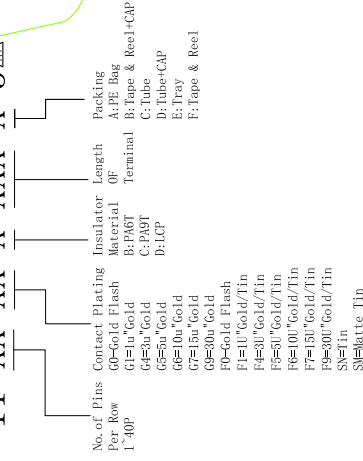

Recommended P. C. B layout

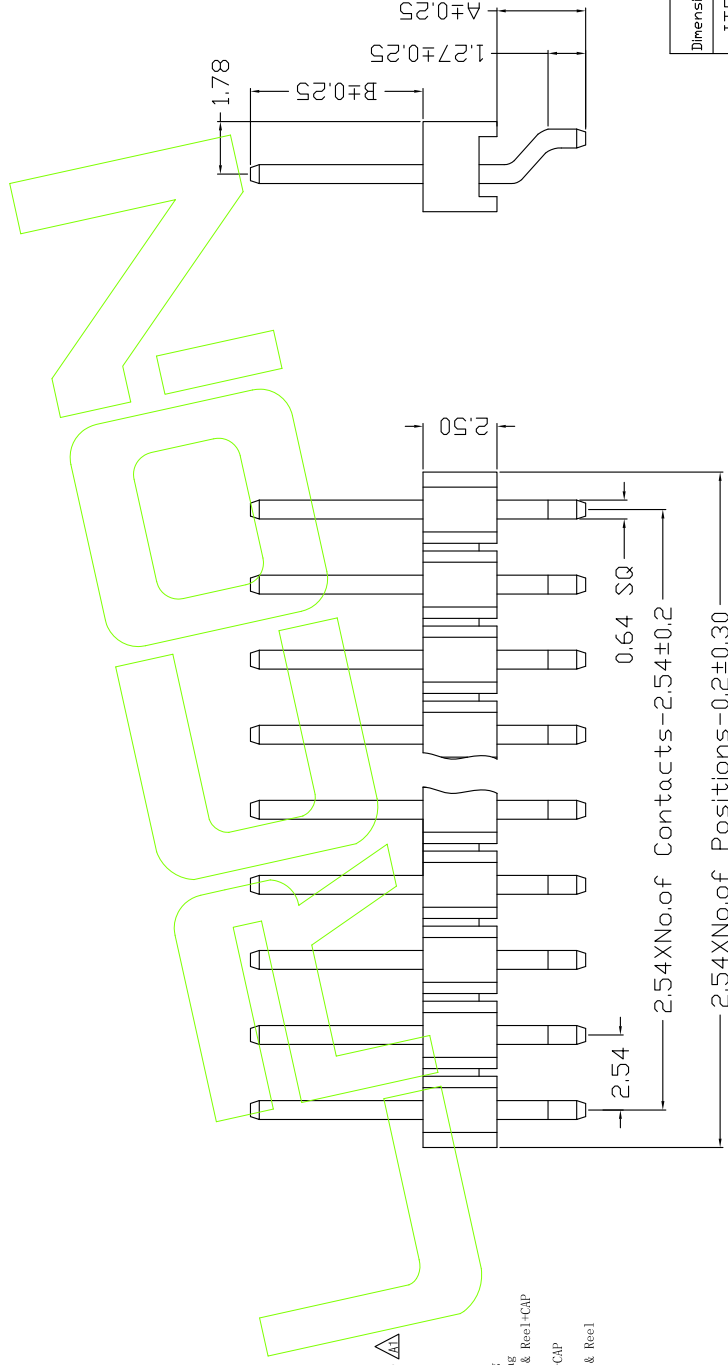

Dimension antitheses list		
ITEM	A	B
Standard	3.00	6.00
Alternate		

[illegible]