

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%GF 1194V-0. 颜色: 黑色

Contact : Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.



耐电压: AC 500V

withstanding voltage: AC 300V.
温度范围: 40°C to $+105^{\circ}\text{C}$


Operation temperature: -40 C to +105 C

Ordering Information

3p257-11 XX XX X XXX X 2^{3A1}

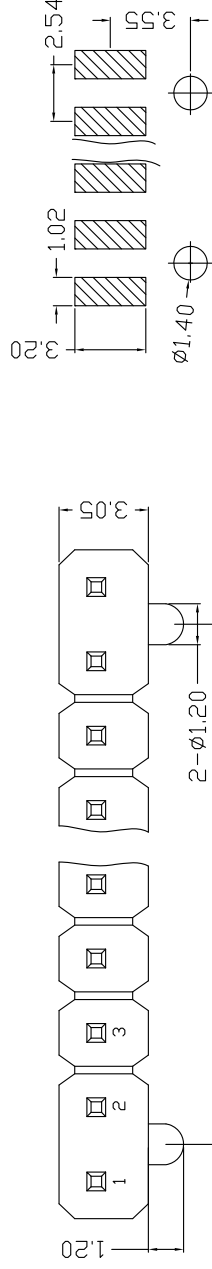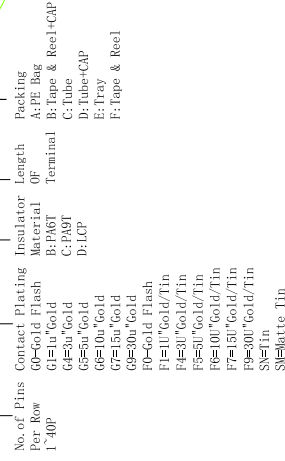

Recommended P. C. B layout

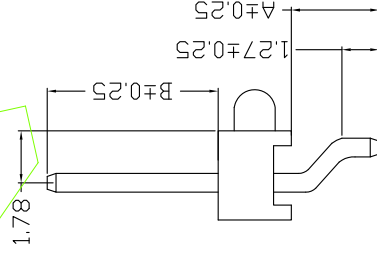

Dimension antitheses (list)		
ITEM	A	B
Standard	3.00	6.00
Alternate		

[illegible]