

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F UL94V-0.Color:Black

Material : Brass

額定電流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

耐电压: AC 500V




温度范围: -40°C 到 $+105^{\circ}\text{C}$

References


Ordering Information

3P25R-32 XX X XXX X 1 Δ_{AT}

No. of Pins Per Row	Contact Plating	Insulator Material	Length Of Terminal	Packing
3-40 ⁰	60-Gold Flash	A: PBT	B: Tape & Reel	A: PE Bag
	G1=10 ⁰ Gold	B: P661	C: Tube	B: Tape & Reel + CAP
	G2=30 ⁰ Gold	C: P661	D: Tube + CAP	
	G3=50 ⁰ Gold	D: LCP	E: Tray	
	G4=100 ⁰ Gold		F: Tape & Reel	
	G5=150 ⁰ Gold			
	G6=300 ⁰ Gold			
	F0=Gold Flash			
	F1=10 ⁰ Gold/Tin			
	F2=30 ⁰ Gold/Tin			
	F3=50 ⁰ Gold/Tin			
	F6=100 ⁰ Gold/Tin			
	F7=150 ⁰ Gold/Tin			
	F9=300 ⁰ Gold/Tin			
	Silver Tin			
	Solderable Tin			

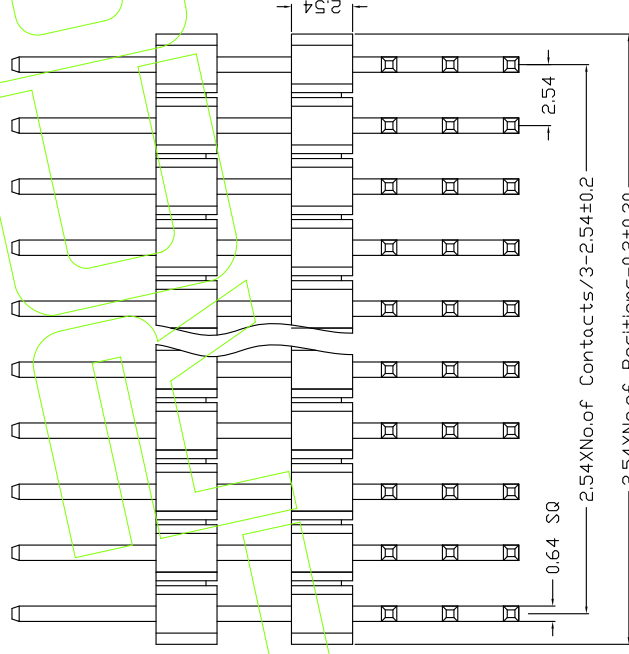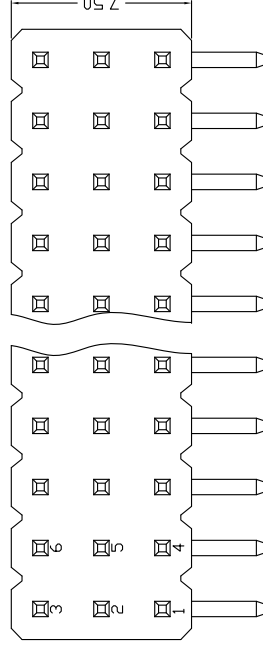

Recommended P.C.B. layout

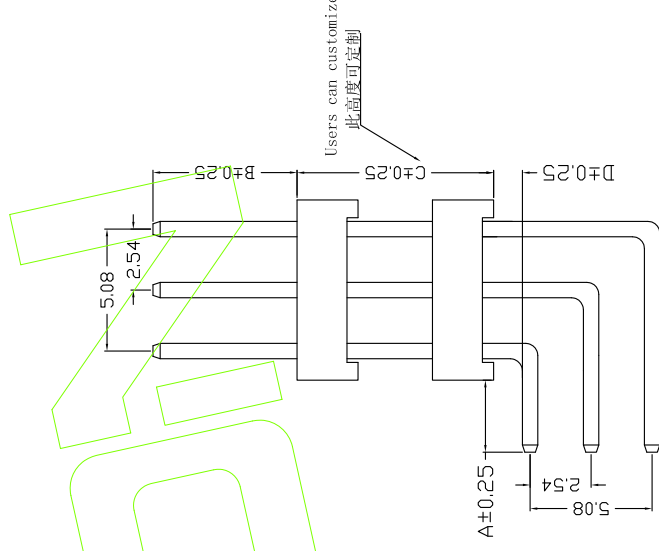

Dimension antitheses list				
ITEM	A	B	D	C
Standard	3,0	6,0	0	1,2
Alternate				

[illegible]