

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F UL94V-0.Color:Black

Material: Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.


耐压: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$



Ordering Information

3P25S-32 XX XX XXX X 1 Δ_{AT}

No. of Pins Per Row	Contact Plating	Insulator Length of Terminal	Packing Material
3-40*	G-Gold Flash	A-PMT	B-Tape & Reel+CAP
	G=30 Gold	C-PMT	C-Tube
	G=50 Gold	D-PMT	D-Tube+CAP
	G=70 Gold	E-LCP	E-Tray
	G=75 Gold		F-Tape & Reel
	G=80 Gold		
	F0-Gold Flash		
	F1=10 Gold/Tin		
	F4=30 Gold/Tin		
	F9=50 Gold/Tin		
	F6=100 Gold/Tin		
	F7=150 Gold/Tin		
	F9=300 Gold/Tin		
	S=1 Tin		
	S=2 Matte Tin		

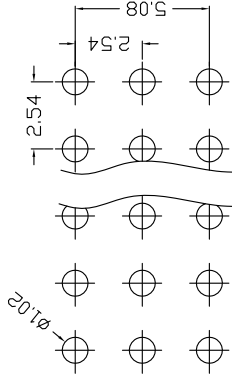

Recommended P.C.B layout

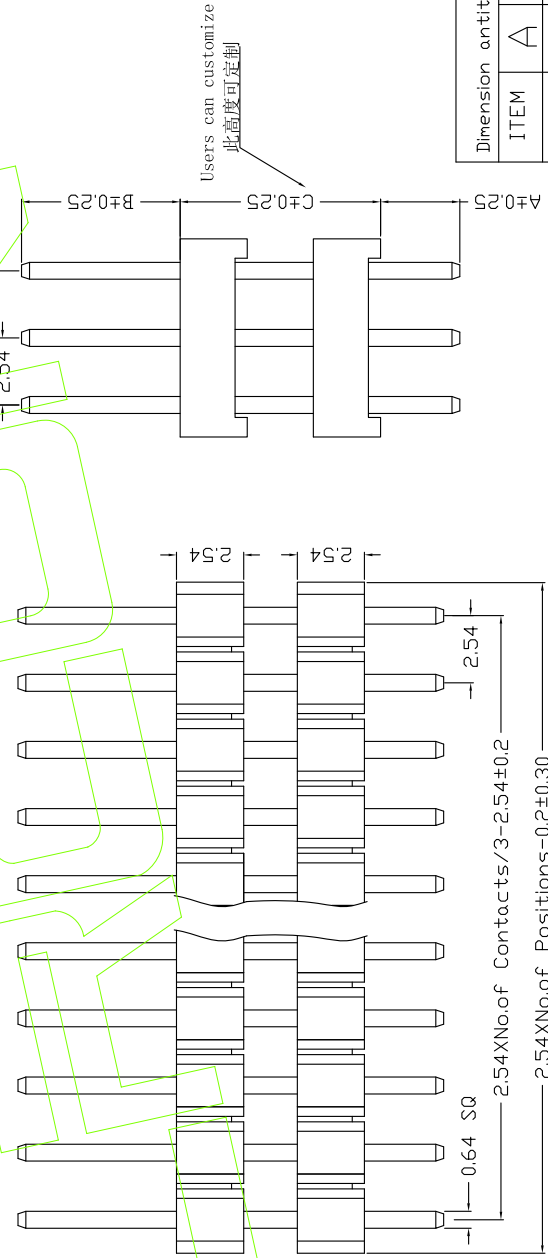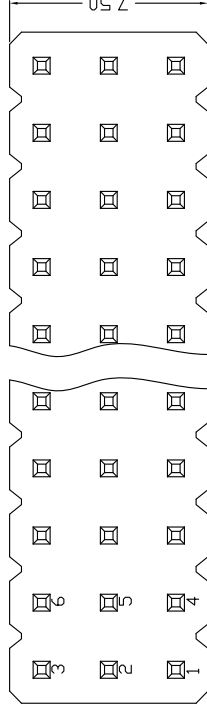

Dimension antitheses list			
ITEM	A	B	C
Standard	3.0	6.0	
Alternate			

[illegible]