

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact :Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

3PXXR- 22 XX XX X XXX X 2△

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length	Packing Method
101H=1.0	2 40P	G=Gold Flash	A:PBT	96"	A:PE Bag
151H=1.5		G=50"Gold	A:PBT		B:Tape & Reel+CAP
201H=2.0		G=50"Gold	B:PA6T		C:Tube
251H=2.54		G=50"Gold	C:PA9T		D:Tube+CAP
		G=101"Gold	D:LCP		E:Tray
		G=500"Gold			F:Tape & Reel
		P=Gold Flash			
		F=10"Gold/Tin			
		F=50"Gold/Tin			
		F=100"Gold/Tin			
		F=150"Gold/Tin			
		F=200"Gold/Tin			
		SN=Tin			
		SM=Matte Tin			

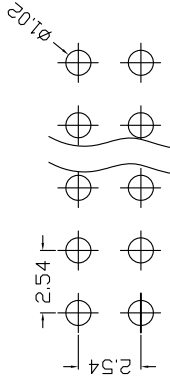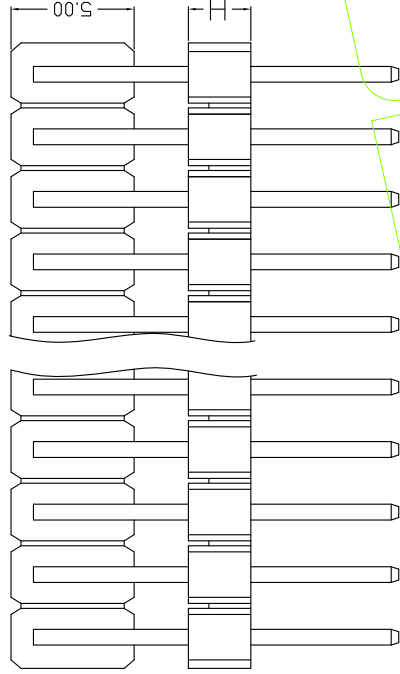

Recommended P. C. B layout

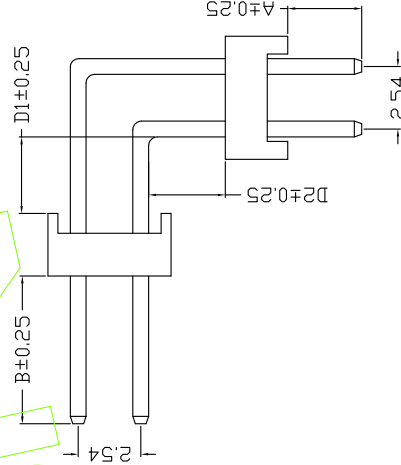

Dimension antitheses list

ITEM	A	B	H	D1	D2
Standard	3.0	6.0	1.0	1.5	1.7
Alternate					

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	3PXXR-22XXXXXXX2
TITLE:	2.54双排针 双塑 90度
Customer No.	

					DRAW	OPERATION		SCALE	Fit	L I A N R	20/06/09	UNIT	DESIGN	CHECK	APPROVE	TOL	APPROVE	CHANGE	DATE	MODIFICATION DESCRIPTION	REV
						X.X	±0.40														
A1	20/06/09				张涛	X.XX	±0.25	A4	DESIGN	张涛			张涛								
A0	12/05/18					X.XXX	±0.15	1/1	CHECK	罗荣军											
REV						Angle	±3°	SHEET	APPROVE	方里军											

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----