

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%GF UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%GF UL94V-0, Color: Black

四方针: 黄铜

Contact :Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

3PXXS- 23 XX XX X XXX X 1△

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing Method
10:±1.0	2/40P	G=Gold Flash	A: PBT	96"	A: PE Bag
15:±1.5		G=50" Gold	B: PA6T		B: Tape & Reel+CAP
17:±1.7		G=50" Gold	C: PA9T		C: Tube
20:±2.0		G=100" Gold	D: LCP		D: Tray+CAP
25:±2.54		G=50" Gold			E: Tray & Reel
		F=Gold Flash			
		F=10" Gold/Tin			
		F=30" Gold/Tin			
		F=50" Gold/Tin			
		F=100" Gold/Tin			
		F=150" Gold/Tin			
		F=200" Gold/Tin			
		SN=Tin			
		SM=Matte Tin			

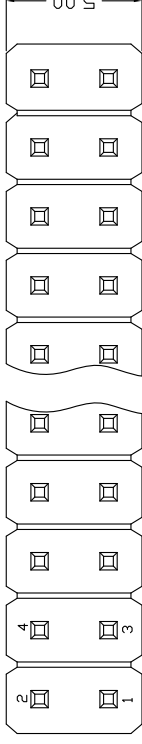

Recommended P.C.B layout

2.54

B±0.25

2.54

C±0.25

A±0.25

2.54

0.64

SQ

2.54XNo.of Contacts/2-2.54±0.2

2.54XNo.of Positions-0.2±0.30

Users can customize

此高度可定制

Dimension antitheses list

ITEM	A	B	H	C
Standard	3.0	6.0	1.0 1.5 1.7 2.0 2.54	/
Alternate				

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	3PXXS-23XXXXXXX1
TITLE:	2.54双排针 三塑 180度
Customer No.	

Fit	SCALE	UNIT
MM	A4	DESIGN
CHECK	1/1	SHEET
APPROVE	PROJ.	

LI	ANR	20/06/09	DESIGN	CHECK	APPROVE
张涛	罗荣军	方里军			

OPERATION	DIM	TOL	APPROVE	CHANGE
X.X ±0.40	Angle	±3°		
X.XX ±0.25				
X.XXX ±0.15				

MODIFICATION DESCRIPTION	DATE
Improve numbering instructions (完善编号标注说明)	20/06/09
NEW	12/05/18

REV	DATE	DESCRIPTION
A1	20/06/09	Improve numbering instructions (完善编号标注说明)
A0	12/05/18	NEW

REV	DATE	DESCRIPTION
A1	20/06/09	Improve numbering instructions (完善编号标注说明)
A0	12/05/18	NEW