

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F UL94V-0.Color: Black

Material: Brass

额定电流: 3 AMP

接觸阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

耐电压: AC 500V.



温度范围: -40°C to $+105^{\circ}\text{C}$

[illegible]

Ordering Information

3PXXS-22 XX XX X XXX X 3

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
Height		Gold Flash				A: Tape Bag
10: ± 1.0	240 ^p	G=10 ^p Gold		A: PBT		B: Tape & Reel+CAP
15: ± 1.5		G=30 ^p Gold		B: PBT		C: Tube
17: ± 1.7		G=50 ^p Gold		C: PBT		D: Tube+CAP
20: ± 2.0		G=100 ^p Gold		D: LCP		E: Tray
25: ± 2.54		G=150 ^p Gold				F: Tape & Reel
		G=300 ^p Gold				
		P0=Gold Flash				
		F1=1U ^p Gold/Tin				
		F2=3U ^p Gold/Tin				
		F3=5U ^p Gold/Tin				
		F6=10U ^p Gold/Tin				
		F7=15U ^p Gold/Tin				
		F9=30U ^p Gold/Tin				
		S0=fin				
		S1=Matte Tin				

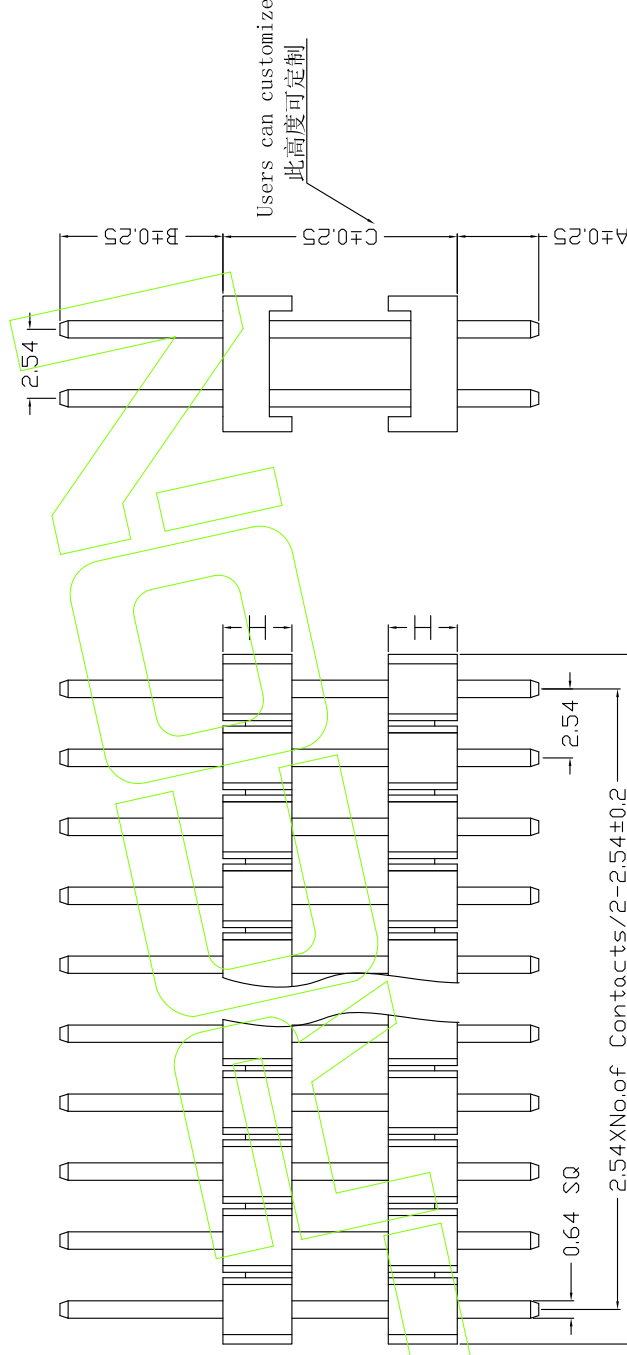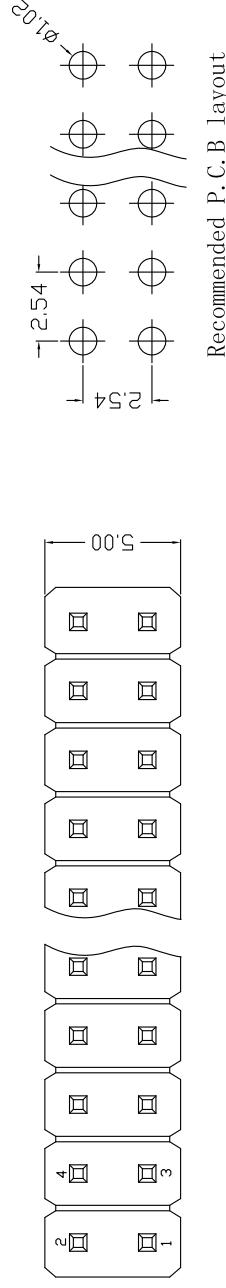

Dimension antitheses list					
ITEM	A	B	H		
Standard	3.0	6.0	1.0	1.5	1.7
Alternate					

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX	±0.25	罗荣军	CHECK	罗荣军	SIZE	A4	DESIGN	PART NO.	3PXXS-22XXXXXXXXXX3
A0	12/05/18	NEW	——	——	X.XXX	±0.15	罗荣军	CHECK	罗荣军	SHEET	1/1	CHECK	TITLE:	2.54双排针 双塑 180度 凹槽朝内
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.	APPROVE	Customer No.			