

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F UL94V-0.Color:Black

Material: Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min



耐压: AC 500V.

温度范围: -40°C to +105°C

Ordering Information

3PXXS-22 XX X XXX X 2^{AT}

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
Height		60-Gold Flash		A: PBT		A: PE Bag
10: ± 1.0	240 ^o	G=1u" Gold		B: PBT		B: Tape & Reel + CAP
15: ± 1.5		G=3u" Gold		C: PBT		C: Tube
17: ± 1.7		G=5u" Gold		D: LCP		D: Tube+CAP
20: ± 2.0		G=10u" Gold				E: Tray
25: ± 2.54		G=15u" Gold				F: Tape & Reel
		G=30u" Gold				
		P0-Gold Flash				
		F1=1U"Gold/Tin				
		F2=3U"Gold/Tin				
		F3=5U"Gold/Tin				
		F6=10U"Gold/Tin				
		F7=15U"Gold/Tin				
		F9=30U"Gold/Tin				
		S0=fin				
		S0=Matte Tin				

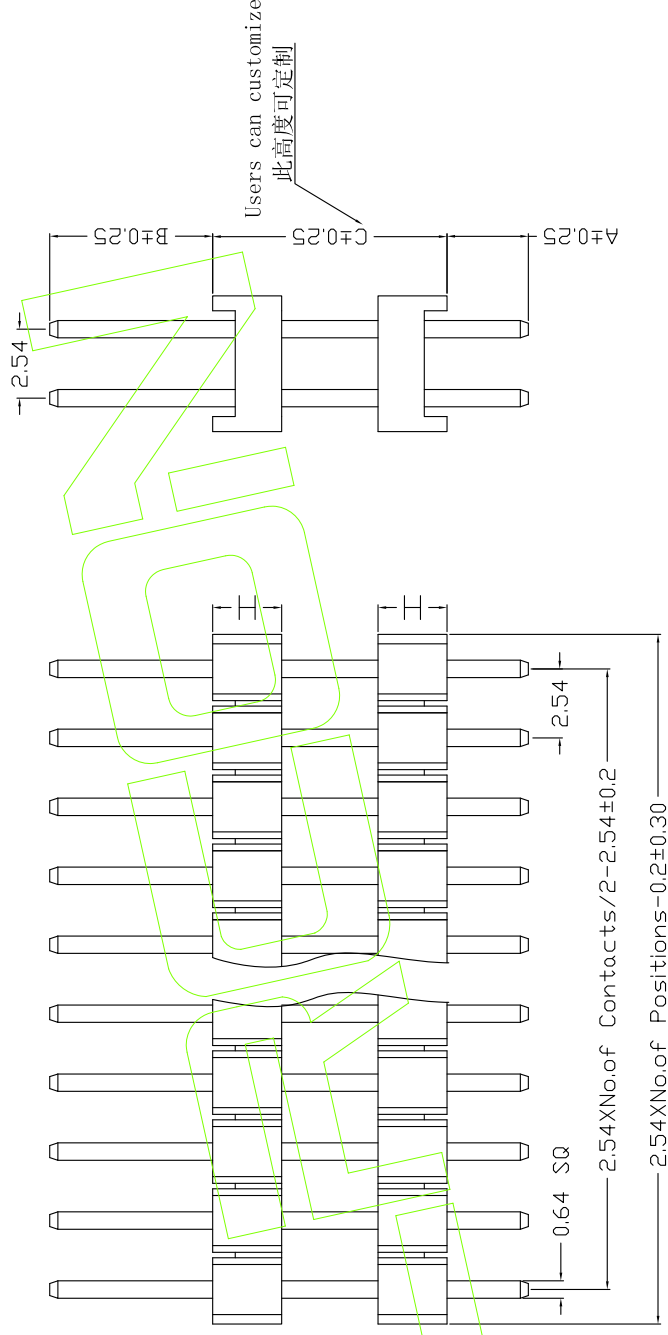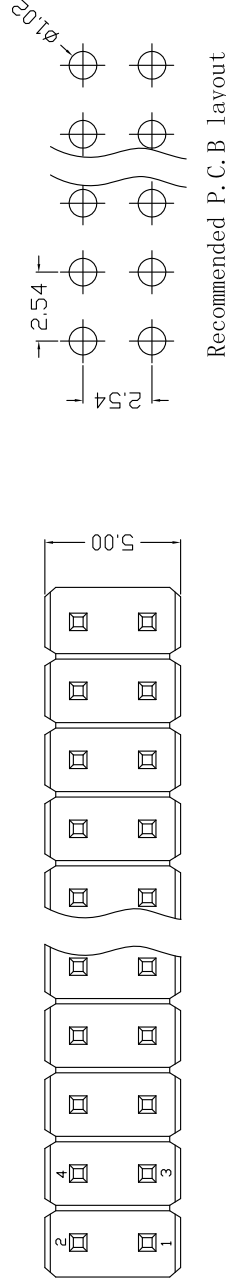

Dimension antitheses list						
ITEM	A	B	H			C
Standard	3.0	6.0	1.0	1.5	1.7	2.0 2.54
Alternate						

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX	±0.25	罗荣军	A4	DESIGN	PART NO.	3PXXS-22XXXXXXXXXX2
A0	12/05/18	NEW	————	————	X.XXX	±0.15	CHECK	1/1	CHECK	TITLE:	2.54双排针 双塑 180度 凹槽朝外
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	Angle	APPROVE	PROJ.	APPROVE	Customer No.	
						±3°	TOL				

10