

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

四方针: 黄铜

Contact :Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40℃ to+105℃

Temperature Range: -40℃ to+105℃

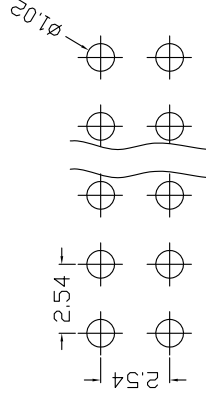

Recommended P. C. B layout

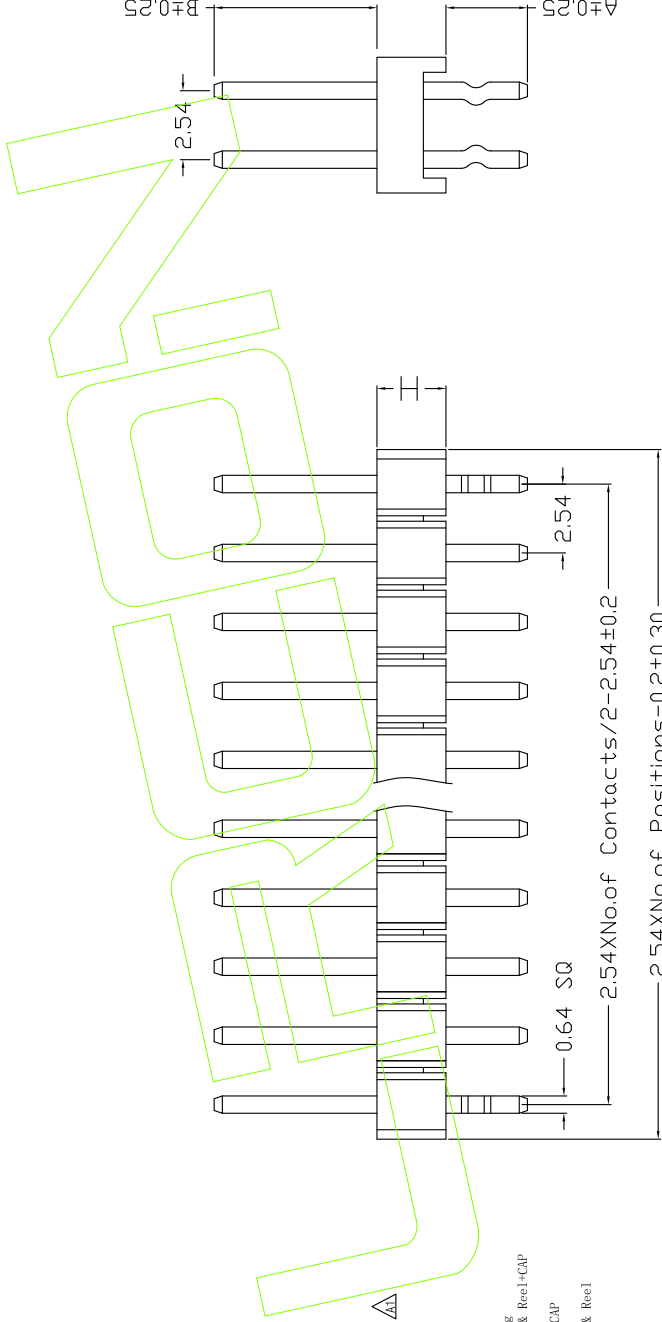

Ordering Information

3PXXS- 21 XX XX X XXX X 2

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length	Packing
Height: 10.1±0.1	2 40P	G=Gold	A:PBT	6P	A:PE Bag
15.1±0.1		G=50"Gold	A:PBT	Terminal	B:Tape & Reel+GUP
17.1±0.1		G=50"Gold	B:PBT		C:Tube
20.1±0.1		G=50"Gold	C:PBT		D:Tube+GUP
25.1±0.1		G=50"Gold	D:LCP		E:Tray
		F=50"Gold			F:Tape & Reel
		F=50"Gold			
		F=50"Gold/Tin			
		F=50"Gold/Tin			
		F=50"Gold/Tin			
		F=50"Gold/Tin			
		F=50"Gold/Tin			
		S=Sn			
		S=Sn			

Dimension antitheses list

ITEM	A	B	H
Standard	3.0	6.0	1.0
Alternate	2.0	2.54	

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	3PXXS-21XXXXXXX2
TITLE:	2.54双排针 180度 打K
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	OPERATION	DRAW	LI	ANR	SCALE	UNIT	Fit
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	△	张涛	X.X	±0.40			DESIGN	张涛	20/06/09				
A0	12/05/18	NEW			X.XX	±0.25			CHECK	罗荣军					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	OPERATION	DRAW	LI	ANR	SCALE	UNIT	Fit