

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%GF UL94V-0, 颜色: 黑色;

端子, 黄铜

2 特性 (characteristics):

额定电压: 3 AMV
Rating Current: 3 AMP.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20







Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V:
Withstanding Volt

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

3PXXM-12 XX XX XXX X Δ_{AT}

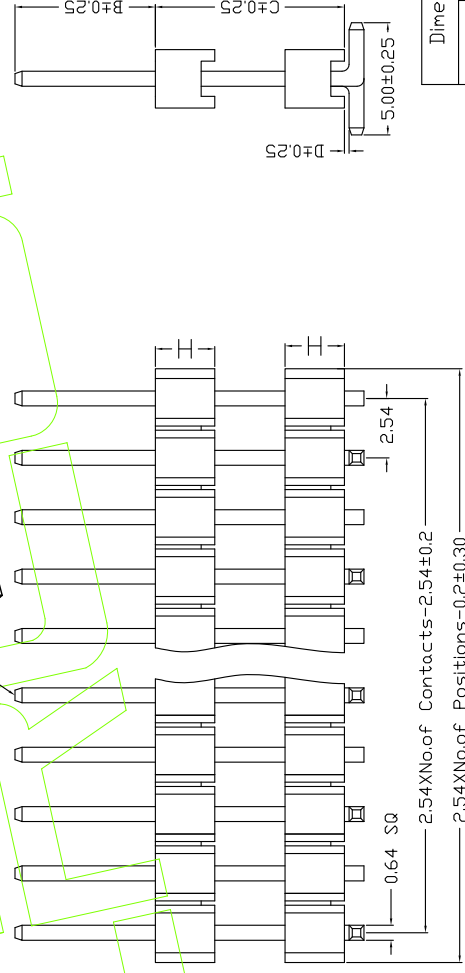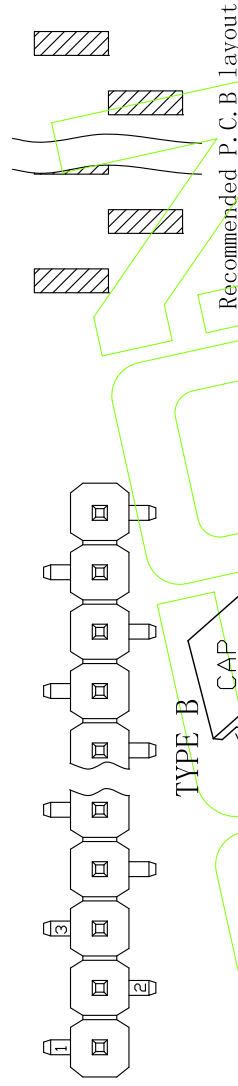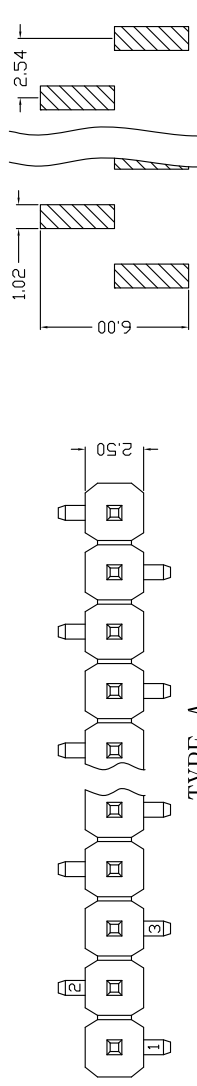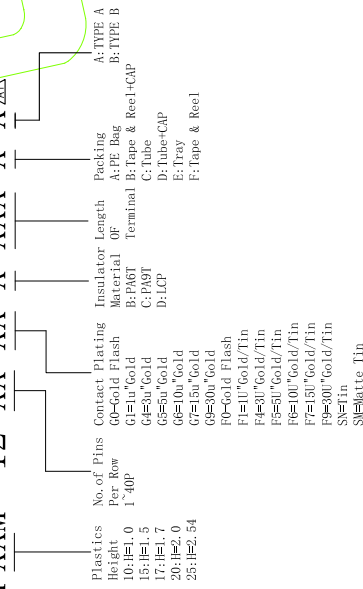

Dimension antitheses list				
ITEM	B	H		D C
Standard	6.0	1.0	1.7	2.0 2.54 1.2
Alternate				

[illegible]