

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T/PBT+30%G.F UL94V-0. Color: Black

Material: Brass

额定电流: 3 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.



耐电压: AC 500V.

温度范围: -40°C to +105°C

Ordering Information

3PXXR-12 XX X XXX X 1 Δ _{A1}

Plastics	No. of Pins	Contact	Plating	Insulator	Length	Packing
Height	Per Row	G=Gold	Flash	Material	0"	A: P/Pe Bag
10: $\pm$ 0	1 40p	G=3u	Gold	A: PBT	Terminal	B: Tape & Reel+CAP
12: $\pm$ 1.5		G=3u	Gold	B: PBT	C: Tube	
15: $\pm$ 1.5		G=5u	Gold	C: PBT	D: Tube+CAP	
17: $\pm$ 1.7		G=10u	Gold	D: LCP	E: Tray	
20: $\pm$ 2.0		G=15u	Gold		F: Tape & Reel	
25: $\pm$ 2.54		G=30u	Gold			
		P0=Gold	Flash			
		F1=1U"Gold/Tin				
		F2=3U"Gold/Tin				
		F3=5U"Gold/Tin				
		F6=10U"Gold/Tin				
		F7=15U"Gold/Tin				
		F9=30U"Gold/Tin				
		S0=fin				
		S1=Platte Tin				

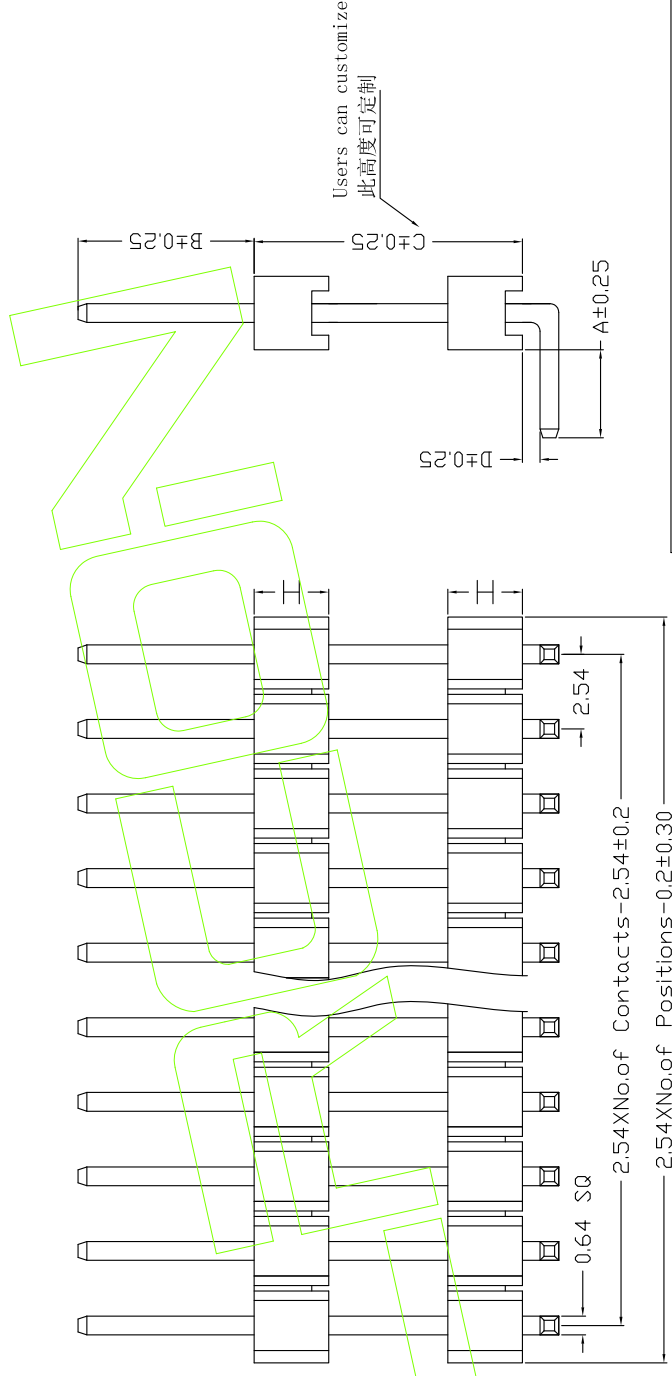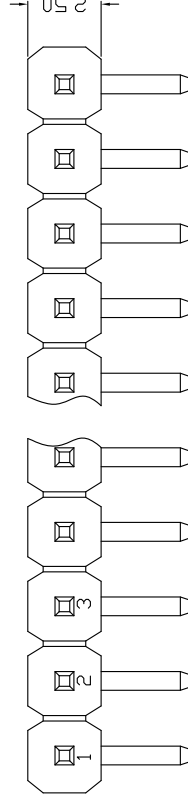

Dimension antitheses list							
ITEM	A	B	H			D	C
Standard	3.0	6.0	1.0	1.5	1.7	2.0 2.54	0 1.2
Alternate							

[illegible]