

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜

Contact : Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

3PXXM- 11 XX XX X XXX X X Δ

Plastics	No. of Pins	Contact Plating	Insulator Length	Packing	A: TYPE A
Height	Per Row	Gold Flash	Material of	A: PE Bag	B: TYPE B
10: H=1.0	1~40P	G=1u Gold	Terminal	B: Tape & Reel	CAP
15: H=1.5		G=3u Gold	C: P89T	C: Tube	
17: H=1.7		G=5u Gold	D: LCP	D: Tube-CAP	
20: H=2.0		G=10u Gold		E: Tray	
25: H=2.54		G=30u Gold		F: Tape & Reel	
		P=50u Gold Flash			
		P=30u Gold/Tin			
		P=50u Gold/Tin			
		P=100u Gold/Tin			
		P=150u Gold/Tin			
		P=300u Gold/Tin			
		Sn=Tin			
		Sn=Matte Tin			

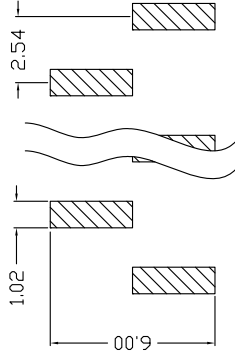


TYPE A

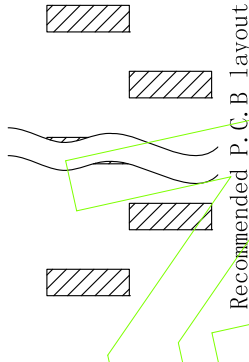

TYPE B

Recommended P.C.B Layout



Dimension antitheses list

ITEM	B	H	D
Standard	6.0	1.0	1.5
Alternate	2.0	2.54	0
	1.2		

Lrcon 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO. 3PXXM-11XXXXXXX

TITLE: 2.54单排针 SMT

Customer No.

SCALE		Fit
UNIT		MM
SIZE	A4	DESIGN
SHEET	1/1	CHECK
PROJ.		APPROVE

LI	AN	DR	OPERATION	SCALE	UNIT
张涛	DESIGN	张涛	DESIGN	张涛	DESIGN
罗荣军	CHECK	罗荣军	CHECK	罗荣军	CHECK
方里军	APPROVE	方里军	APPROVE	方里军	APPROVE

20/06/09	20/06/09	20/06/09	20/06/09	20/06/09	20/06/09
张涛	张涛	张涛	张涛	张涛	张涛
罗荣军	罗荣军	罗荣军	罗荣军	罗荣军	罗荣军
方里军	方里军	方里军	方里军	方里军	方里军

CHANGE	APPROVE	APPROVE	APPROVE	APPROVE	APPROVE
CHANGE	CHANGE	CHANGE	CHANGE	CHANGE	CHANGE
CHANGE	CHANGE	CHANGE	CHANGE	CHANGE	CHANGE
CHANGE	CHANGE	CHANGE	CHANGE	CHANGE	CHANGE

2	3	4	5	6	7
2	3	4	5	6	7
2	3	4	5	6	7
2	3	4	5	6	7

1	2	3	4	5	6
1	2	3	4	5	6
1	2	3	4	5	6
1	2	3	4	5	6

1	2	3	4	5	6
1	2	3	4	5	6
1	2	3	4	5	6
1	2	3	4	5	6