

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-O, Color: Black

四方针: 黄铜

Contact :Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

3PXXR- 11 XX XX X XXX X 1 Δ

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
10: H=1.0	1~40P	G=50"Gold	A: PBT	9P	A: PE Bag
15: H=1.5		G=50"Gold	B: PA6T		B: Tape & Reel+GIP
17: H=1.7		G=50"Gold	C: PA9T		G: Tube
20: H=2.0		G=50"Gold	D: LCP		D: Tray
25: H=2.54		G=50"Gold			F: Tape & Reel
		F=50"Gold Flash			
		F=100"Gold/Tin			
		F=150"Gold/Tin			
		F=200"Gold/Tin			
		S=7"Sn			
		S=Matte Tin			



Recommended P.C.B layout

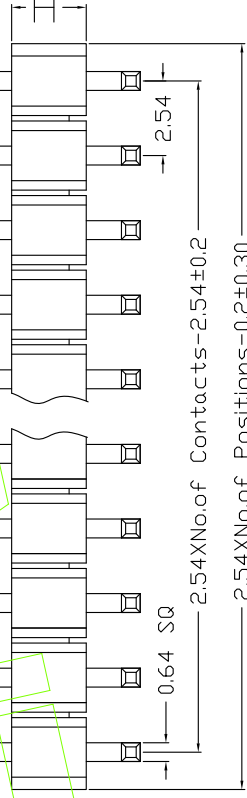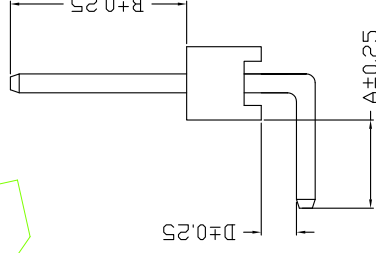

Dimension antitheses list

ITEM	A	B	H	D
Standard	3.0	6.0	1.0 1.5 1.7	2.0 2.54 0 1.2
Alternate				

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	3PXXR-11XXXXXXX1
TITLE:	2.54单排针 90度 弯凹面
Customer No.	

					DRAW	LI	AN	20/06/09	SCALE		Fit
									UNIT	MM	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	DESIGN	张涛			A4	DESIGN	
A0	12/05/18	NEW	—	—	CHECK	罗荣军			1/1	CHECK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	APPROVE	方里军		PROJ.	APPROVE	