

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-O, Color: Black

四方针: 黄铜

Contact :Brass

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40℃ to+105℃

Temperature Range: -40℃ to+105℃




Recommended P.C.B layout

Ordering Information

3PXXS- 11 XX XX X XXX X 1 Δ

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length of Terminal	Packing
10:IE=1.0	1-40P	GF=Gold	A:PBT	9P	A:PE Bag
15:IE=1.5		G=50"Gold	B:PA6T		B:Tape & Reel+GUP
17:IE=1.7		G=50"Gold	C:PA9T		G:Tube
20:IE=2.0		G=50"Gold	D:LCP		D:Tray
25:IE=2.54		G=50"Gold			F:Tape & Reel
		PF=Gold Flash			
		F=10"Gold/Tin			
		F=30"Gold/Tin			
		F=50"Gold/Tin			
		F=100"Gold/Tin			
		F=150"Gold/Tin			
		F=200"Gold/Tin			
		SN=Tin			
		SM=Matte Tin			

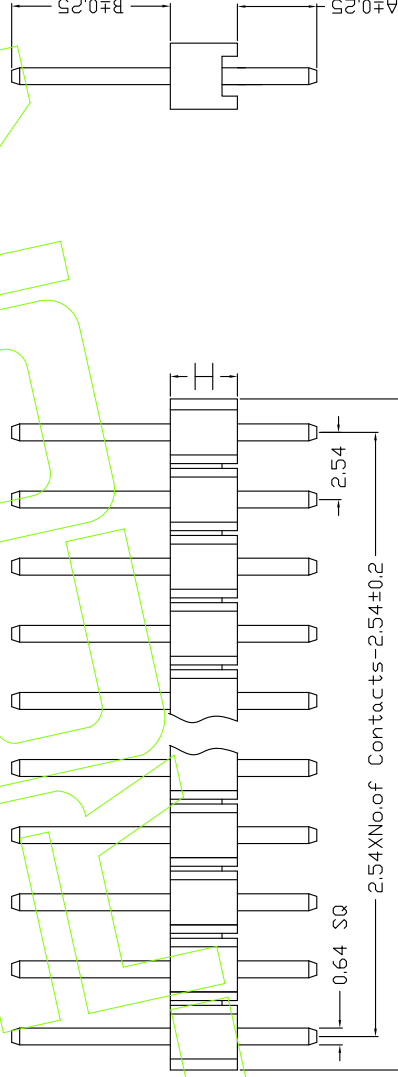

Dimension antitheses list

ITEM	A	B	H
Standard	3.0	6.0 1.0	1.5 1.7 2.0 2.54
Alternate			

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	SHEET	PROJ.	APPROVE	CUSTOMER NO.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40		张涛	DESIGN	A4	DESIGN	1/1	CHECK	罗荣军	3PXXS-11XXXXXXX1
A0	12/05/18	NEW	—	—	X.XX	±0.25		—	CHECK	1/1	CHECK			—	2.54单排针 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	SHEET	PROJ.	APPROVE	CUSTOMER NO.