

HSF RoHS Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Material : Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

接触电阻: $\leq 3 \text{ m}\Omega$ MAX;
Contact Resistance: 20

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C



temperature range: 40 to 120 °C

Ordering Information

2P20S-42 XX X XXX X 2_{AN}

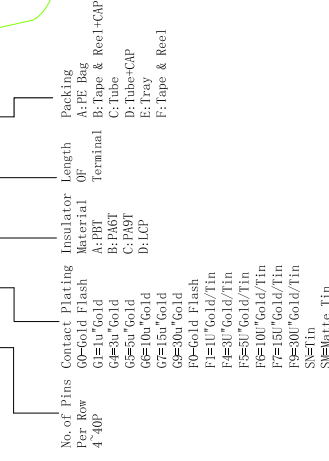

Recommended P.C.B layout

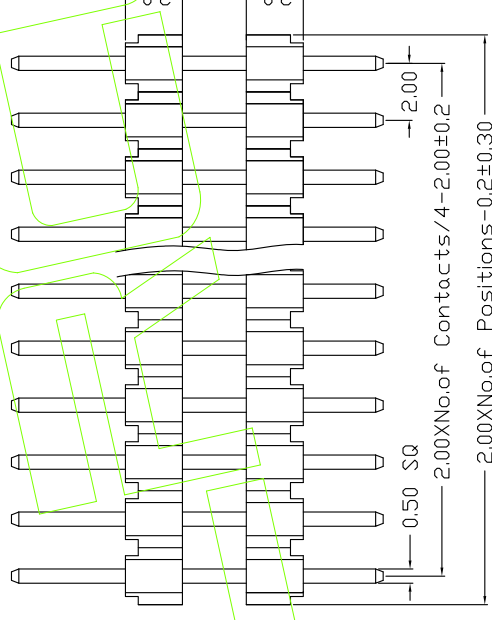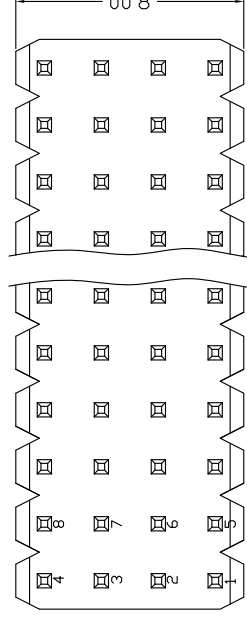

Users can customize
此高度可定制

Dimension antitheses list			
ITEM	A	B	C
Standard	2.8	4.0	
Alternate			

[illegible]