


HSF RoHS Specifications

- 备注(Remark)
1. 材料(MATERIAL)
- 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
- Housing: PA6T+30%G.F UL94V-0, Color: Black
- 四方针: 黄铜
- Contact :Brasse
2. 特性 (Characteristics):
- 额定电流: 2 AMP
- Rating Current:2 AMP.
- 接触阻抗: 20 mΩ MAX.
- Contact Resistance:20 mΩ MAX.
- 绝缘阻抗: 1000 MΩ min.
- Insulating Resistance:1000 MΩ min.
- 耐电压: AC 500V.
- Withstanding Voltage:AC 500V.
- 温度范围: -40°C to+105°C
- Temperature Range: -40°C to+105°C


Ordering Information

2PXXM- 22 XX XX X XXX X 1△

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length	Packing Method
10:IE=1.0	2+40P	G=10"Gold	R:PA6T	0P	A:PE Bag
15:IE=1.5		G=30"Gold	C:PA9T	Terminal	B: Tape & Reel+CAP
20:IE=2.0		G=50"Gold	D:LCP		C: Tube
		G=100"Gold			D:Tray
		G=150"Gold			E:Tray
		G=300"Gold			F: Tape & Reel
		F=10"Gold/Tin			
		F=30"Gold/Tin			
		F=50"Gold/Tin			
		F=100"Gold/Tin			
		F=150"Gold/Tin			
		F=300"Gold/Tin			
		Sn=Tin			
		Sn=Matte Tin			

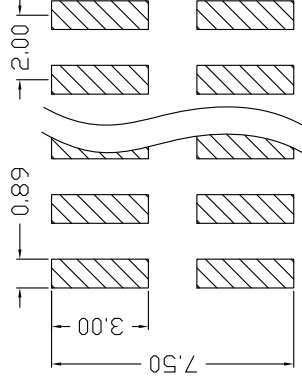

Recommended P.C.B layout

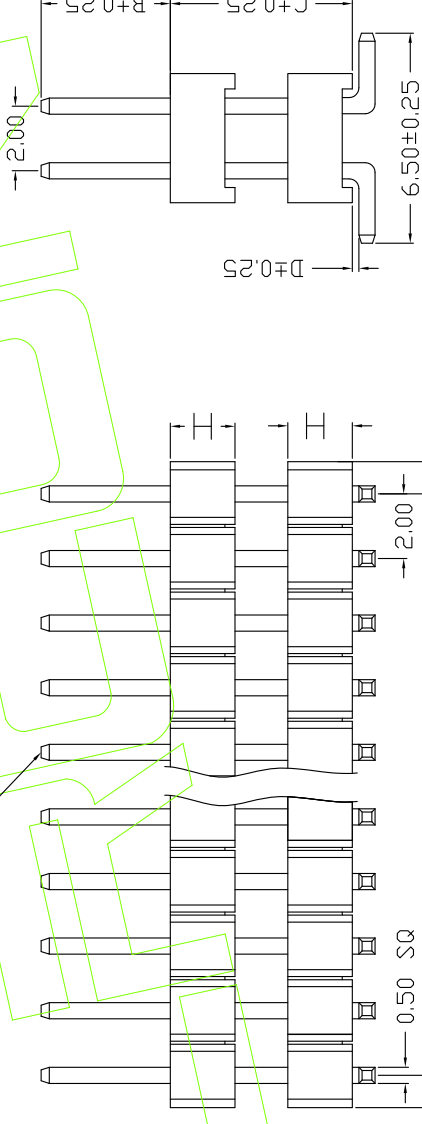

Dimension antitheses list

ITEM	B	H	D	C
Standard	2.8	4.0	1.0	1.5
Alternate	2.0	0	0.75	

LIRCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	2PXXM-22XXXXXXX1
TITLE:	2.0双排针 双塑 SMT
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	APPROVE	CHANGE	4	5	6	7	8	9	10
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	△							
A0	12/05/18	NEW									
REV	DATE	MODIFICATION DESCRIPTION	APPROVE	CHANGE	4	5	6	7	8	9	10