

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Material : Steel
Contact : Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.



Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

2PXXR-22 XX XX X XXX X $2\Delta_{A1}$

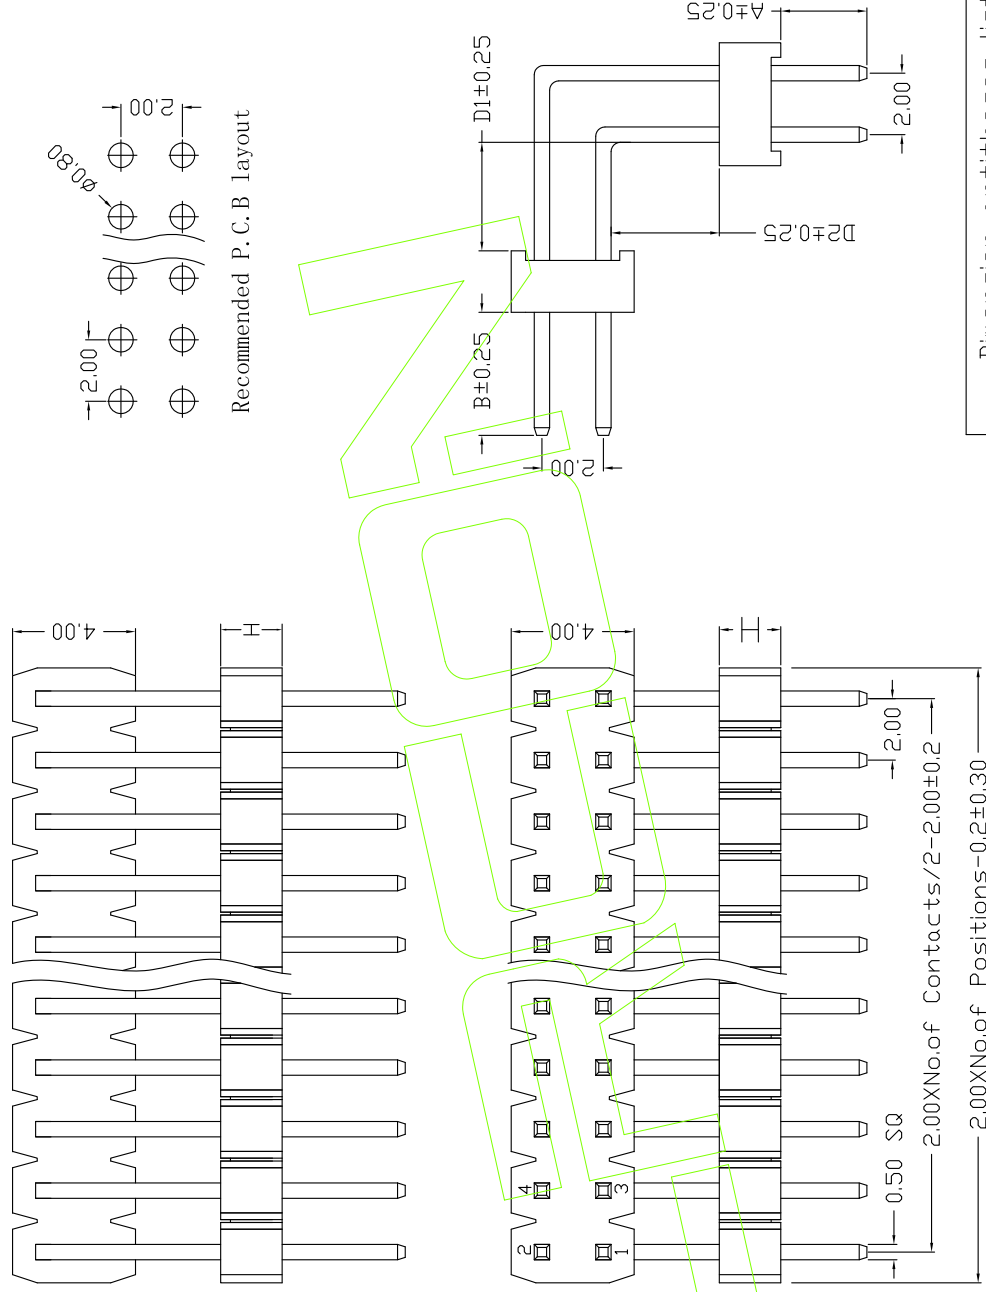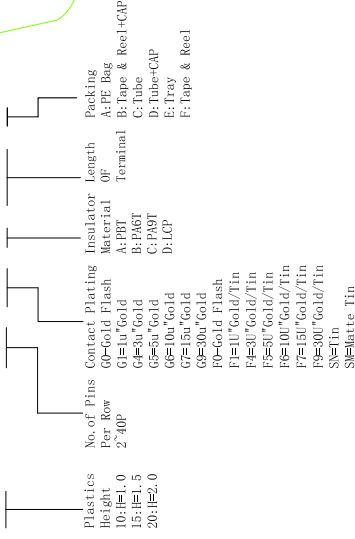

Dimension antitheses list

ITEM	A	B	H		D ₁	D ₂	C
Standard	2.8	2.8	4.0	1.0	1.5	2.0	
Alternate							

ZOU J

连润电子有限公司
Lirun Electronics Co., Ltd

						OPERATION	DRAW	LIANR	20/06/09	SCALE	Fit	
						X.X ±0.40	DESIGN	张涛		UNIT	MM	
A1	20/06/09					X.XX ±0.25	CHECK	罗荣军		SIZE A4	DESIGN	
A0	12/05/18					X.XXX ±0.15	Angle ±3°			SHEET	TITLE:	2PXR-22XXXXXXXXXX2
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	PROJECTOR.	Customer No.					