

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T/PBT+30%G.F. UL94V-0.Color:Black

Material : Brass

额定电流: 2 AMP

接触阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

耐电压: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


0
9
3
4
-
2
0
2
+
0

T


Ordering Information

2PXXS-22 XX XX XXX X 1 Δ_{A1}

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length Of Terminal	Packing
10: $\pm$.0	2-40 ϕ	GO-Gold Flash	A: PBT	F: Tape Bag	A: PET & Roel+CAP
15: $\pm$.1-1.5		G=1U*Gold	B: PAET	C: Tube	
20: $\pm$ 2.0		G=5U*Gold	C: PAET	D: Tube+CAP	
		G=10U*Gold	D: LCP	E: Tray	
		G=15U*Gold		F: Tape & Roel	
		G=30U*Gold			
		FO-Gold Flash			
		F=1U*Gold/Tin			
		F=3U*Gold/Tin			
		F=5U*Gold/Tin			
		F=10U*Gold/Tin			
		F=15U*Gold/Tin			
		F=30U*Gold/Tin			
		Sn=Tin			
		Sn=Matte Tin			

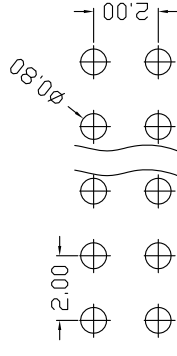

Recommended P.C.B. layout

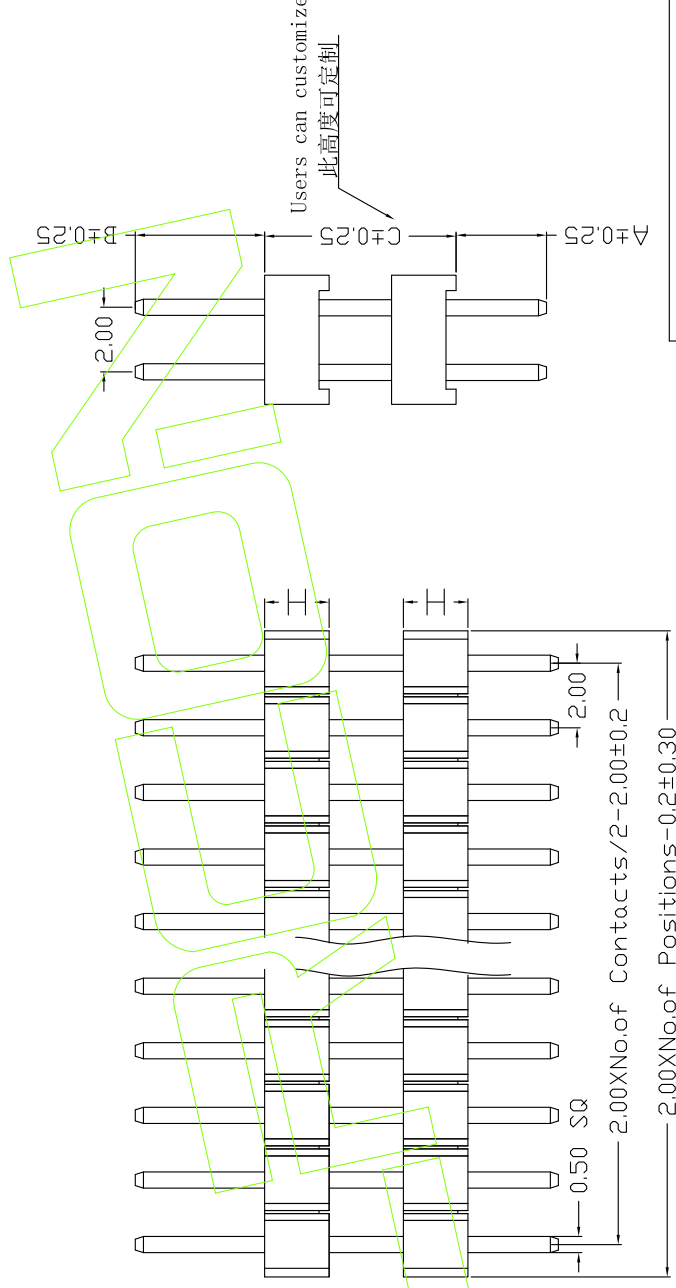

Dimension antitheses list

ITEM	A	B	H	C
Standard	2.8	2.8	4.0	1.5
Alternate				2.0

Zoom

连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX ±0.25			SHEET	A4	DRAWING NO.	PART NO.	2PXS-22XXXXXXXXXX1
A0	12/05/18	NEW			X.XXX ±0.15	CHECK	罗荣军		1/1	CHECK	TITLE:	2.0双排针 双塑 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	PROJECT	APPROVE	CUSTOMER NO.		