


HSF RoHS Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜
Contact :Brasse
2. 特性 (characteristics):
额定电流: 2 AMP
Rating Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C



Ordering Information

2PXXM- 21 XX XX X XXX X 2△△

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length	Packing Method
10: I=1.0	20	G=10" Gold	R: PA6T	0°	A: PE Bag
15: I=1.5	20	G=15" Gold	C: PA9T	Terminal	B: Tape & Reel+CAP
20: I=2.0	20	G=20" Gold	D: LCP		C: Tube
		G=25" Gold			D: Tube+CAP
		G=30" Gold			E: Tray
		G=35" Gold			F: Tape & Reel
		F=10" Gold/Tin			
		F=30" Gold/Tin			
		F=50" Gold/Tin			
		F=100" Gold/Tin			
		F=150" Gold/Tin			
		F=300" Gold/Tin			
		Sn= Tin			
		Sn= Matte Tin			

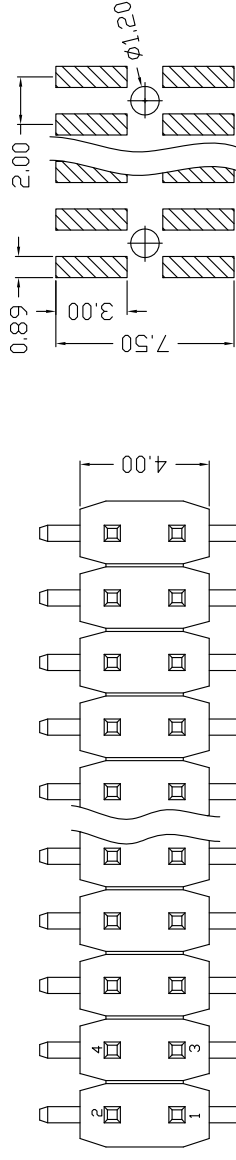

Recommended P.C.B layout

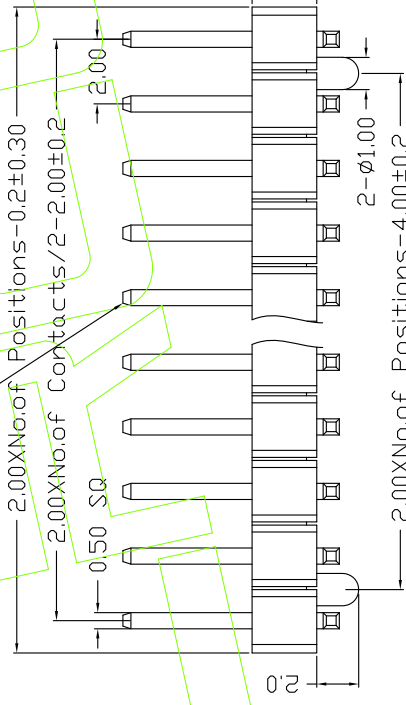

Dimension antitheses list				
ITEM	B	H	D	
Standard	4.0	1.0	1.5	2.0
Alternate			0	0.75

Lrcon		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	2PXXM-21XXXXXXXXX2
A0	12/05/18	NEW		CHECK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE: 2.0双排针 SMT带柱
				Customer No.	