

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

Contact : Brasse

额定电流: 2 AMP

接觸阻抗: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

耐电压: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$


0
0
0
4
-
0
0
2
-

+



Ordering Information

2PXXS-21 XX XX XXX X 1 Δ_{A1}

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length	Packing
10: ± 1.0	2-40 ^p	G=Gold	Flash	A: PBT	0"	A: PE Bag
13: ± 1.5		G=3u" Gold		B: PBT	Terminal	B: Tape & Reel+CAP
20: ± 2.0		G=5u" Gold		C: PBT		C: Tube
		G=10u" Gold		D: LCP		D: Tube+CAP
		G=15u" Gold				E: Tray
		G=30u" Gold				F: Tape & Reel
		P0=Gold	Flash			
		F=1U" Gold	Tin			
		F=3U" Gold	Tin			
		F=5U" Gold	Tin			
		F=10U" Gold	Tin			
		F=15U" Gold	Tin			
		F=30U" Gold	Tin			
		S=Matte	Tin			



Recommended P.C.B. layout

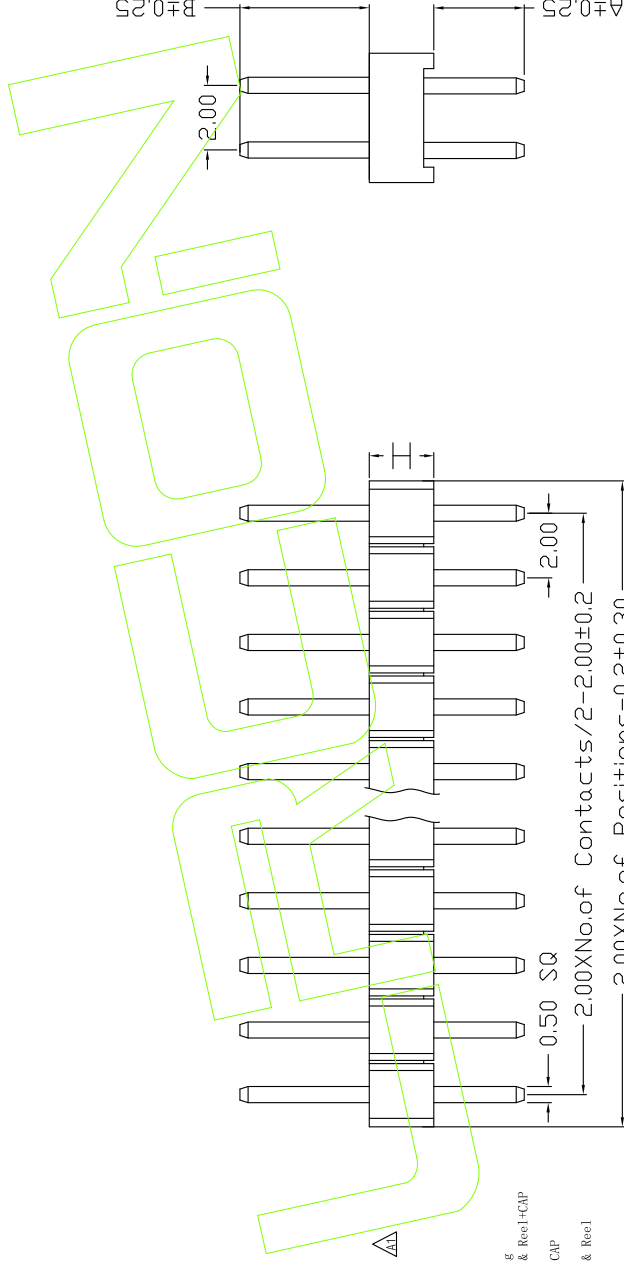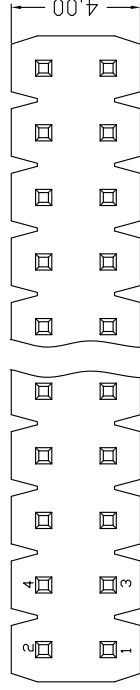

Dimension antitheses list				
ITEM	A	B	H	
Standard	2.8	4.0	1.0	1.5
Alternate				2.0

[illegible]