



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact : Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

1P25C- 21 XX XX X XXX X 1 Δ

No. of Pins Pin Row 2 30P	Contact Plating	Insulator Material	Length mm	Packing Method
	G=Gold	M=PA6T	90°	A:PE bag
	G=10" Gold	R=PA6T	Terminal	B: Tape & Reel+CAP
	G=30" Gold	C: PA9T		C: Tube
	G=50" Gold	D: LCP		D: Tube+CAP
	G=100" Gold			E: Tray
	G=150" Gold			F: Tape & Reel
	G=300" Gold			
	P=Gold Flash			
	P=10" Gold/Tin			
	P=30" Gold/Tin			
	P=50" Gold/Tin			
	P=100" Gold/Tin			
	P=150" Gold/Tin			
	P=300" Gold/Tin			
	Sn= Tin			
	SM= Matte Tin			

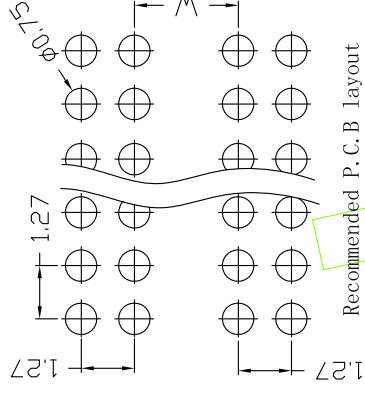

Recommended P.C.B layout

A±0.25

Custom Width
此宽度可定制

D±0.25

Dimension antitheses list

ITEM	W	D	A	H
Standard	5.0	6.0	1.05	1.55
Alternate	2.3	1.6	2.0	2.5

LIRCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO. 1P25C-21XXXXXXX1

TITLE: 1.27双排针 塑高2.5 桥型

Customer No.

APPROVE

CHECK

DESIGN

MM

UNIT

SCALE

Fit

20/06/09

LI

ANR

20/06/09

SCALE

OPERATION

DRAW

DESIGN

UNIT

APPROVE

CHANGE

4

4

3

3

3

3

2

2

2

2

1

1

1

1