

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

Material : Steel
Contact : Brass

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

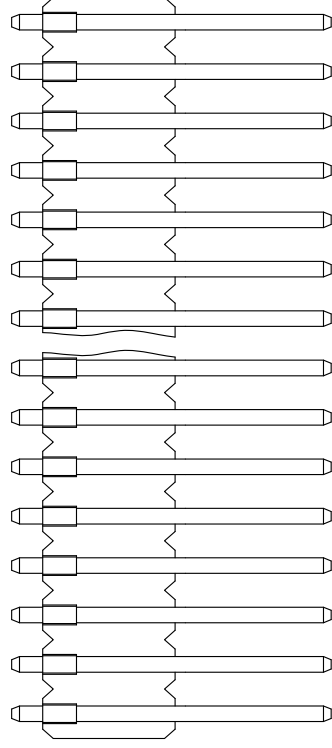
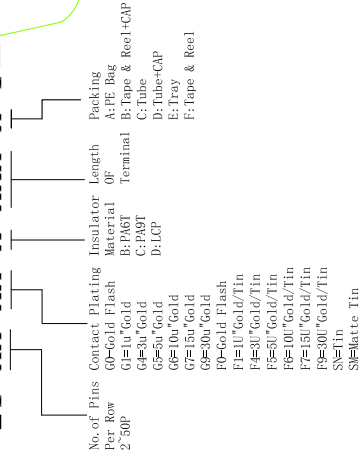
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

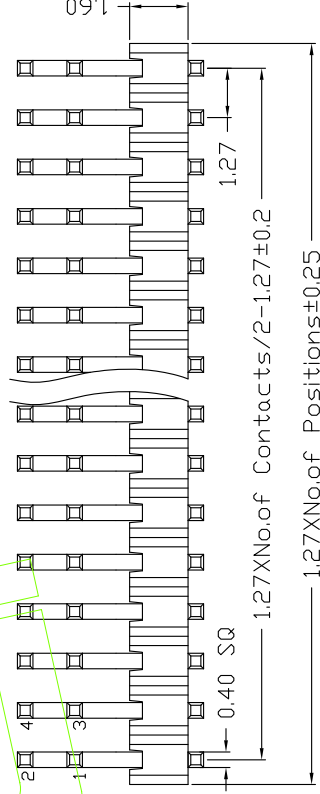
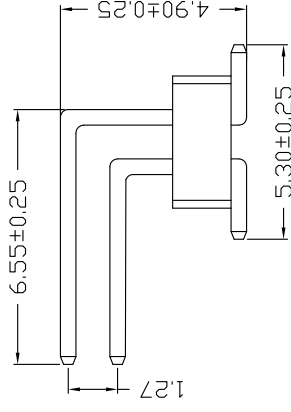
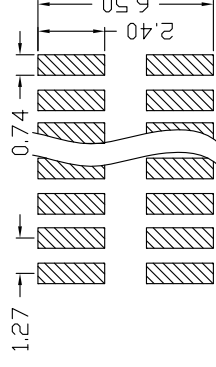
Temperature Range: -40°C to +105°C

Ordering Information

1P16L-21 XX XX XXX X 1 Δ_{A1}



Recommended P.C.B layout

[illegible]