

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

Contact : Brass

2. 特性 (characteristics)

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

1000 MΩ

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.
耐电压: AC 500V

耐电压: AC 500V.
Withstanding Voltage



温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C 到 $+103^{\circ}\text{C}$
Temperature Range: -40°C



temperature range: 40 to 120 °C

Ordering Information

1PXXR-22 XX X XXX X 1

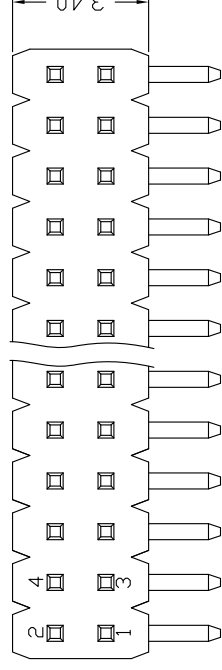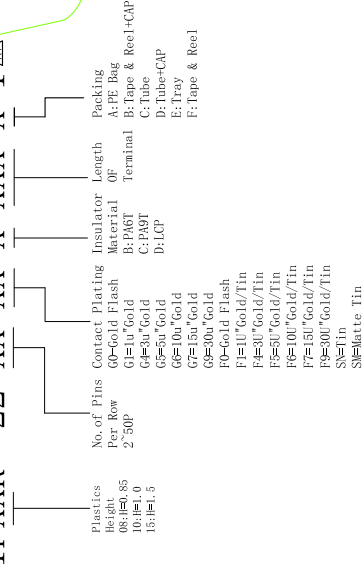

Recommended P.C.B. layout

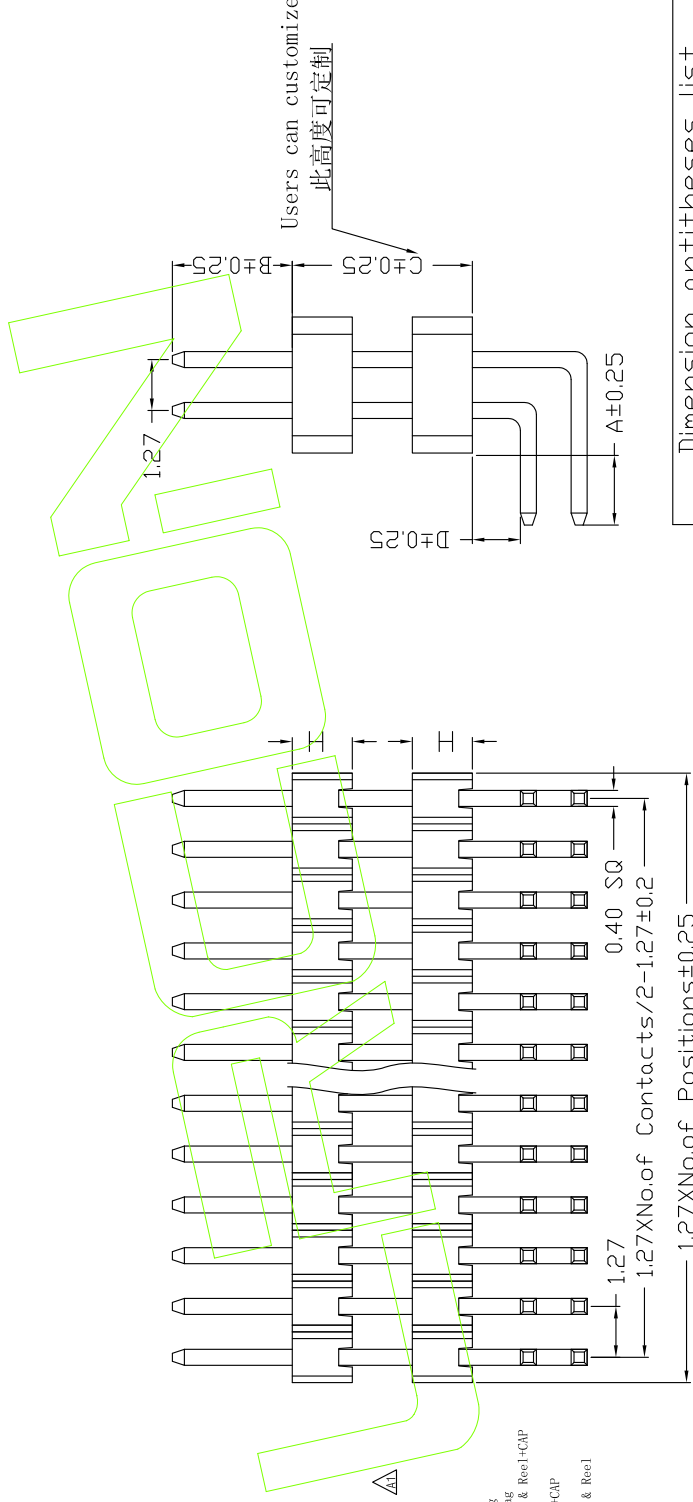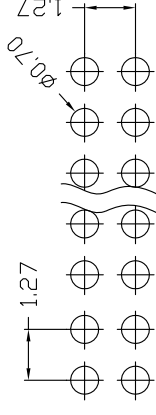

Dimension antitheses list

ITEM	D	A	B	H	C
Standard	0	1.2	1.8	3.0	4.0
Alternate					
				0.85	1.0
					1.5

ZOUJI

连润电子有限公司
Lrcon Electronics Co., Ltd.

[illegible]