

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜

Material : Brass

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


(0
9
8
7
6
5
4
3
2

•
Q
- - - - -
+ + + + +


Ordering Information

1PXXS-21 XX XX XXX X 1

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length Of Terminal	Packing
08: $\frac{1}{16}$: 0.85	2-30P	G=Gold Flash	B: PAFI	F: Tape & Reel + CAP	A: PE Bag
10: $\frac{1}{16}$: 1.0		G=5M Gold	C: PAFI	D: Tube	E: Tray
13: $\frac{1}{16}$: 1.5		G=10u Gold	D: LCP	F: Tube+CAP	F: Tape & Reel
		G7=15u Gold			
		G9=30u Gold			
		R=Gold Flash			
		F=1U"Gold/Tin			
		F=3U"Gold/Tin			
		F=5U"Gold/Tin			
		F=10U"Gold/Tin			
		F=15U"Gold/Tin			
		F=30U"Gold/Tin			
		S=Satin			
		Sh=Matte Tin			

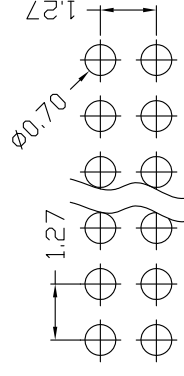

Recommended P.C.B layout

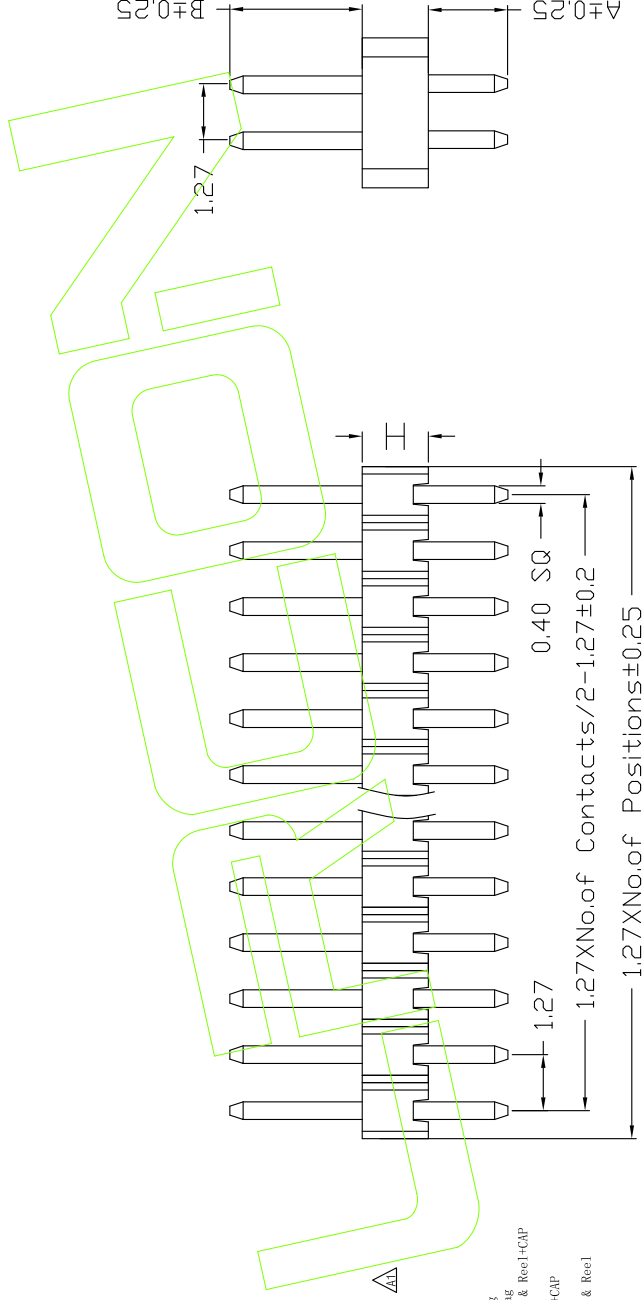

Dimension antitheses list				
ITEM	A	B	H	
Standard	18	18 30 40 085	10 15	
Alternater				

[illegible]