



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact : Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

额定电流: 1 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

1PXXR- 11 XX XX X XXX X 1 Δ

Plastics	No. of Pins	Contact Plating	Insulator	Length	Packing
Height	Pz Row	Q=Gold Flash	M: PAF	0°	A: PE Bag
10: ±0.65	1 30P	G=10" Gold	R: PAF	Terminal	B: Tape & Reel+CP
15: ±1.6		G=30" Gold	C: PAF		C: Tube
15: ±1.6		G=50" Gold	D: LCP		D: Tube+CP
17: ±1.7		G=100" Gold			E: Tray
20: ±2.0		G=150" Gold			F: Tape & Reel
25: ±2.54		G=300" Gold			
		P=Gold Flash			
		F=10" Gold/Tin			
		F=30" Gold/Tin			
		F=50" Gold/Tin			
		F=100" Gold/Tin			
		F=150" Gold/Tin			
		F=300" Gold/Tin			
		Sn= Tin			
		SM= Matte Tin			

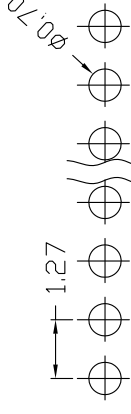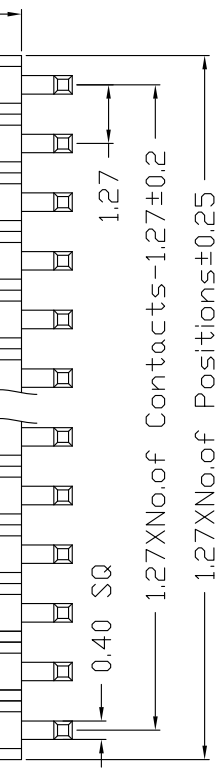

Recommended P.C.B layout



Dimension antitheses list

H	0.65	1.0	1.5	1.5	1.5	1.7	2.0	2.54
W	2.4	2.1	1.5	2.0	2.4	2.4	2.4	2.4

Dimension antitheses list

ITEM	A	B	D
Standard	1.8	1.8	3.0
Alternate	0	1.0	1.2

LARCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

PART NO.	1PXXR-11XXXXXXX1
TITLE:	1.27单排针 90度
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DESIGN	LI	ANR	20/06/09	SCALE	UNIT	Fit
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40	DESIGN	张涛	张涛	张涛	张涛	UNIT	MM	
A0	12/05/18	NEW			X.XX	±0.25	CHECK	罗荣军	罗荣军	罗荣军	罗荣军	SIZE	A4	DESIGN
					X.XXX	±0.15	SHEET					1/1	CHECK	
					Angle	±3°	PROJ.					APPROVE		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----