

HSF RoHS Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black
四方针: 黄铜
Contact : Brass
2. 特性 (Characteristics):
额定电流: 1 AMP
Rating Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.
耐压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

Ordering Information

1PXXS- 11 XX XX X XXX X 1 Δ

Plastics Height 0.65
0.65
1.0
1.5
1.7
2.0
2.5
Pz Row 1 30P
No. of Pins
Contact Plating
G=Gold Flash
G=10" Gold
G=30" Gold
G=50" Gold
G=100" Gold
G=150" Gold
G=300" Gold
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=300" Gold/Tin
Sn= Tin
Sm= Matte Tin


Insulator Material
M: PA6T
R: PA6T
C: PA9T
D: LCP

Length 0.05"
Terminal


Packing
A: PE Bag
B: Tape & Reel+CP
C: Tube
D: Tube+CP
E: Tray
F: Tape & Reel

Dimension antitheses list

H	0.65	1.0	1.5	1.5	1.5	1.7	2.0	2.54
W	2.4	2.1	1.5	2.0	2.4	2.4	2.4	2.4

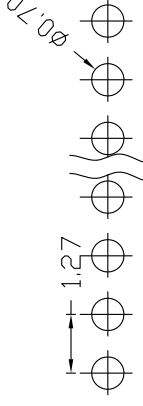

Recommended P.C.B layout

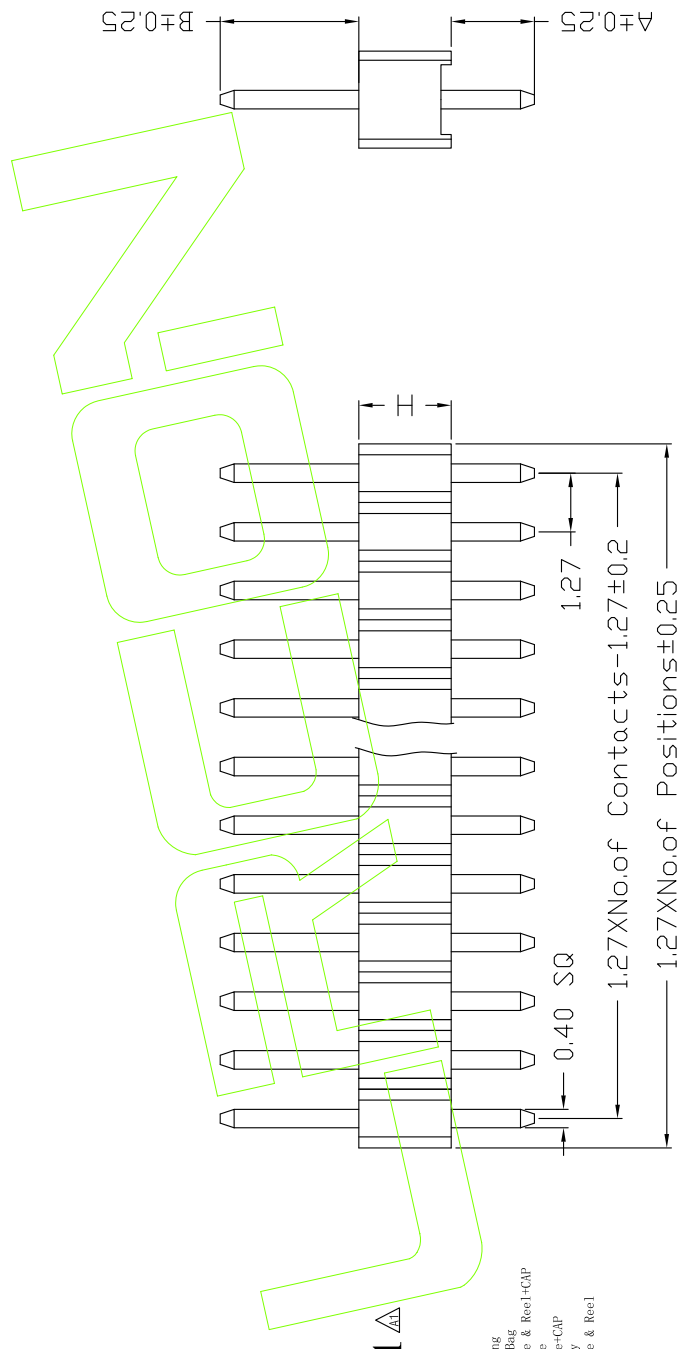

ITEM	A	B
Standard	1.8	1.8
Alternate	3.0	4.0

连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号与标注说明)	张涛	DESIGN	MM	Fit
A0	12/05/18	NEW	张涛	CHECK	1/1	CHECK
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----