

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接觸阻抗: 20 mΩ MAX.

20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to +105°C

0
0
2
4
-
2
2
0
2

.

0
-


-

T

Ordering Information

4PXXM-22 XX X XXX X 2^{AD}

Plastics	No. of Pins Per Row	Contact Plating	Insulator Material	Length Of Terminal	Packing
17: ± 1.7	250P	Gold Flash	B: PAET		A: PE Bag
25: ± 2.54		G=1u" Gold	C: PA9T		B: Tape & Roel+CAP
		G=3u" Gold	D: LCP		C: Tube
		G=5u" Gold			D: Tube+CAP
		G=10u" Gold			E: Tray
		G=15u" Gold			F: Tape & Roel
		G=30u" Gold			
		P0=Gold Flash			
		F=1U" Gold/Tin			
		F=3U" Gold/Tin			
		F=5U" Gold/Tin			
		F=10U" Gold/Tin			
		F=15U" Gold/Tin			
		F=30U" Gold/Tin			
		S=Sn/Tin			
		S=Matte Tin			

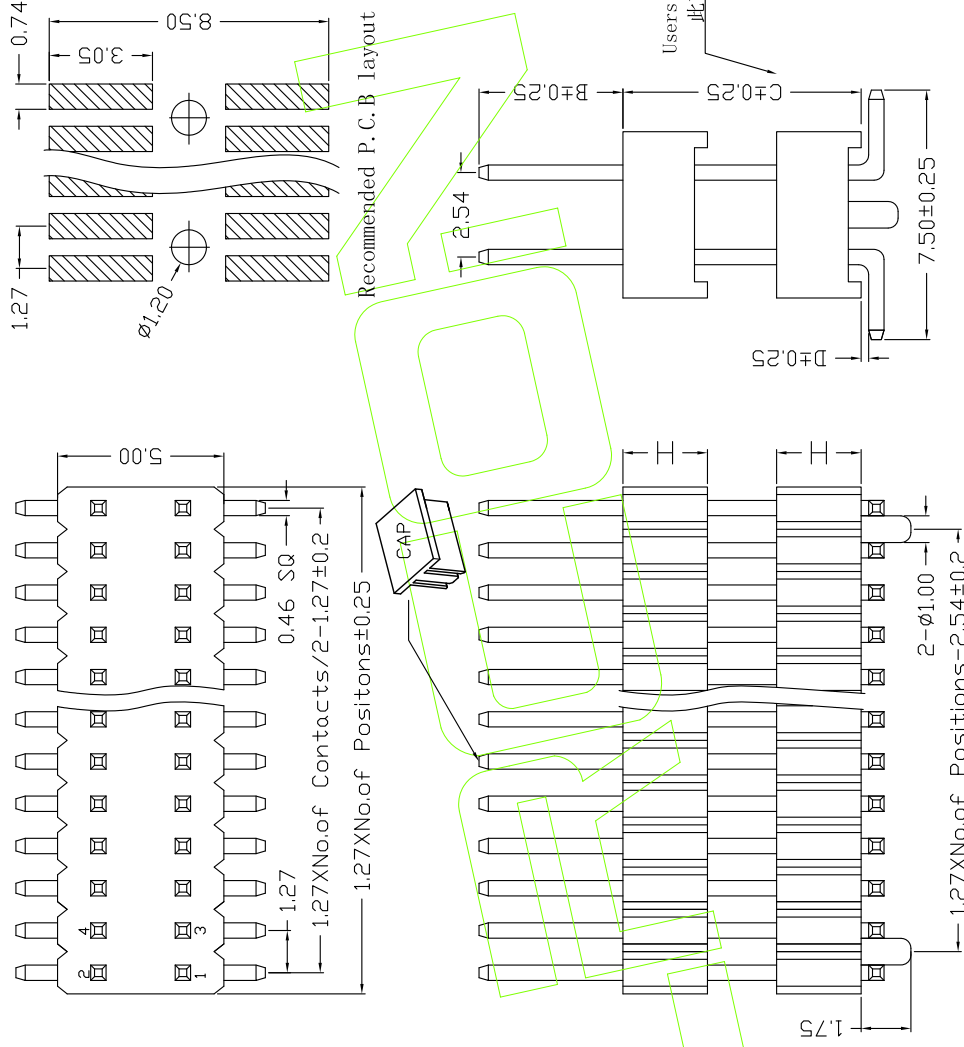

Users can customize
此高度可定制

Dimension antitheses list				
ITEM	B	D	H	C
Standard	2.8	6.0	0	1.2 1.7 2.54
Alternate				

[illegible]