


HSF RoHS Specifications

Temperature range: -40 C to +105 C

Plastics	No. of Pins Per Row	Contact	Plating	Insulator Material	Length Of Terminal	Packing
17: $\Pi=1.7$	2 50 ϕ	GO-Gold	Flash	B: PBT	F: Tape & Reel	Bag
23: $\Pi=2.54$		G=3u" Gold		C: PBT	C: Tube	
		G=5u" Gold		D: LCP	D: Tube	
		G=10u" Gold			E: Tray	
		G=15u" Gold			F: Tape & Reel	
		G=30u" Gold				
		PO-Gold	Flash			
		P=1U" Gold/Tin				
		P=3U" Gold/Tin				
		P=5U" Gold/Tin				
		P=10U" Gold/Tin				
		P'=15U" Gold/Tin				
		P=30U" Gold/Tin				
		S=Fin				
		S=Matte Tin				

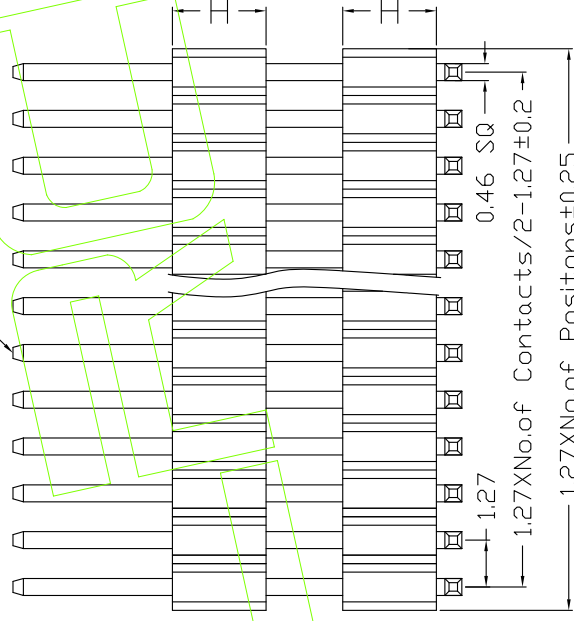

5

[illegible]