

HSF RoHS Specifications




备注(Remark)

1. 材料(MATERIAL)
 胶芯: PA6T/LCP+30%GF UL94V-0, 颜色: 黑色,
 Housing: PA6T/LCP+30%GF UL94V-0, Color: Black
 四方针: 黄铜

2. 特性 (Characteristics):
 额定电流: 1 AMP
 Rating Current: 1 AMP
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ min.
 Insulating Resistance: 1000 MΩ min.
 耐电压: AC 500V
 Withstanding Voltage: AC 500V.
 温度范围: -40℃ to +105℃
 Temperature Range: -40℃ to +105℃

Ordering Information

4PXXS-21 XX XX XXX X 1 Δ_{A1}

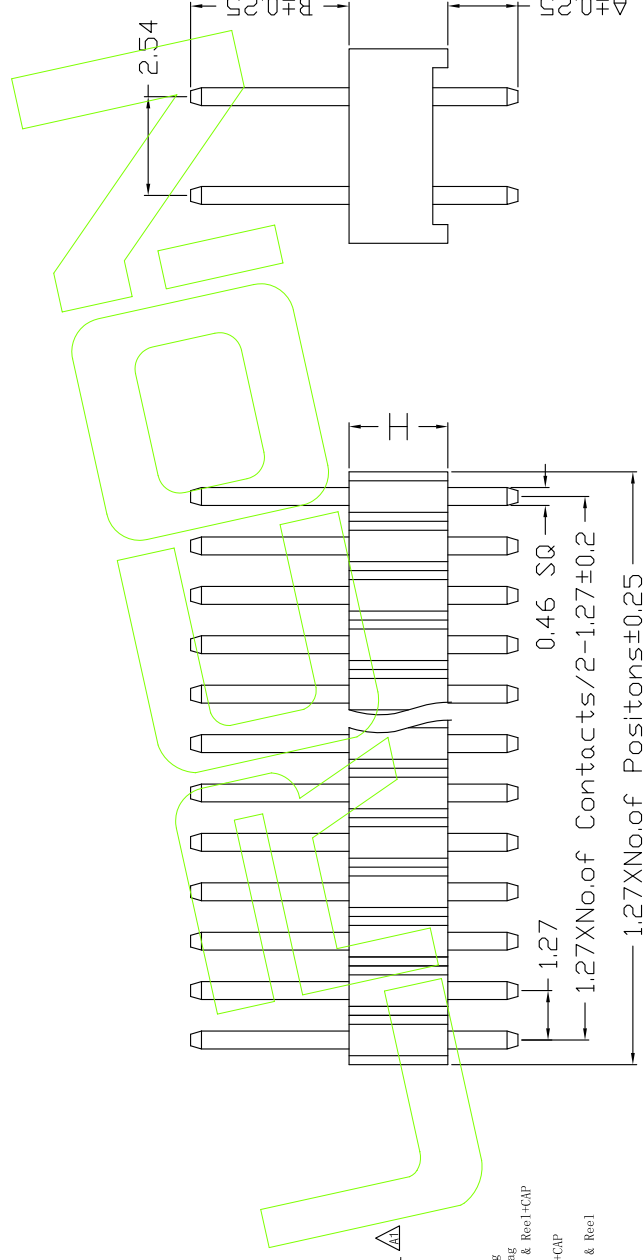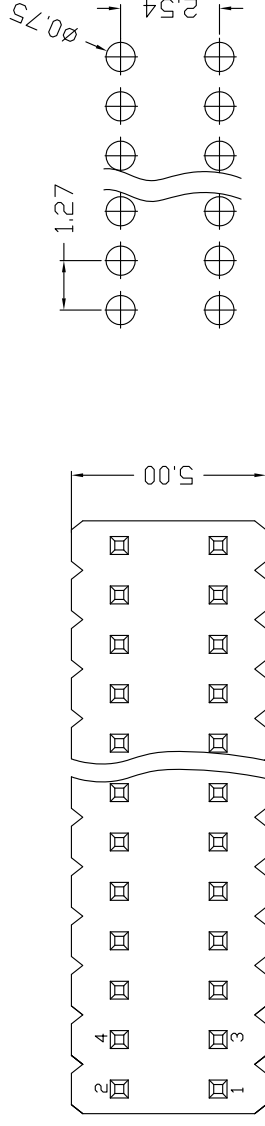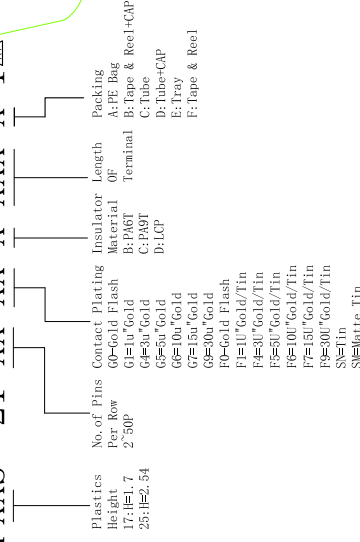

Dimension antitheses list				
ITEM	A	B	H	
Standard	1.8	2.8	6.0	1.7
Alternate				2.54

[illegible]