

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

额定电压: AC 500V.
Withstanding Voltage: AC 500V.






温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: 40–100 °C

Ordering Information

5PXXM-22 XX X XXX X 2A

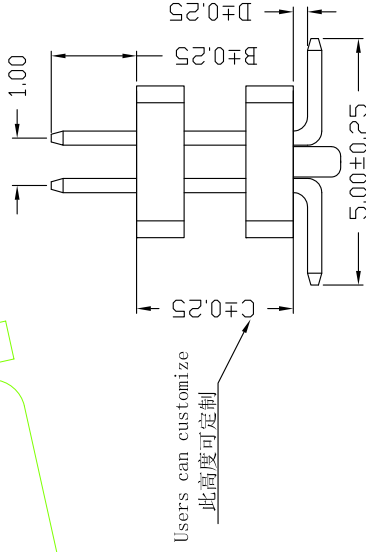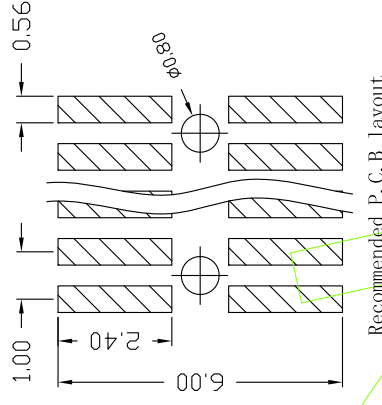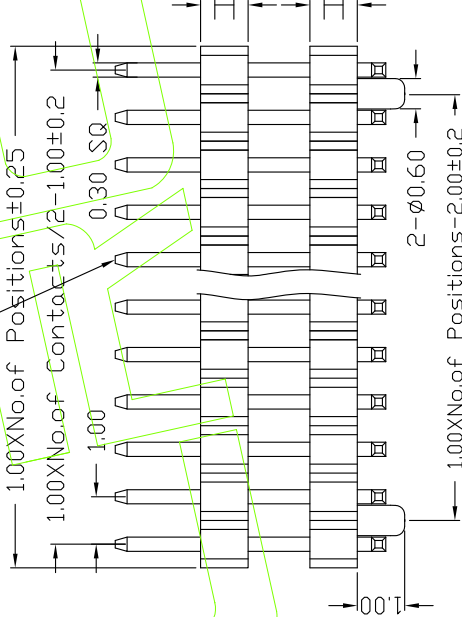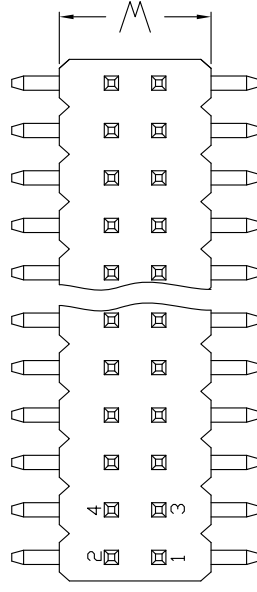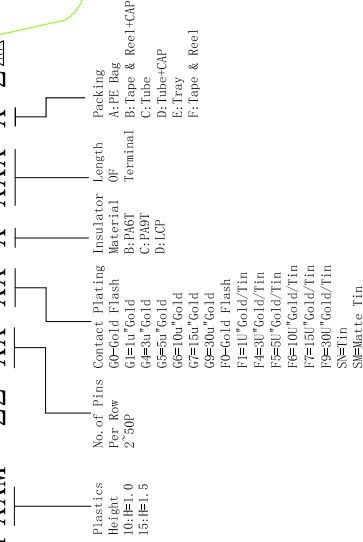

Dimension antitheses list					
ITEM	B	D	H	W	
Standard	1.8	0.1	1.0	1.5	2.3
Alternate					

[illegible]