



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact : Phosphor bronze

2. 特性 (Characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

5PXXM- 21 XX XX X XXX X 2△△

Plastics	No. of Pins Pz: Row 10: #=1, 0 15: #=1, 5	Contact Plating	Insulator Material	Length 0° Terminal	Packing
		G=Gold Flash	M: PA6T		A: PE bag
		G=10" Gold	R: PA6T		B: Tape & Reel+CP
		G=30" Gold	C: PA9T		C: Tube
		G=50" Gold	D: LCP		D: Tray+CP
		G=100" Gold			E: Tray
		G=150" Gold			F: Tape & Reel
		G=300" Gold			
		F=Gold Flash			
		F=10" Gold/Tin			
		F=30" Gold/Tin			
		F=50" Gold/Tin			
		F=100" Gold/Tin			
		F=150" Gold/Tin			
		F=300" Gold/Tin			
		Sn=Tin			
		Sn=Matte Tin			

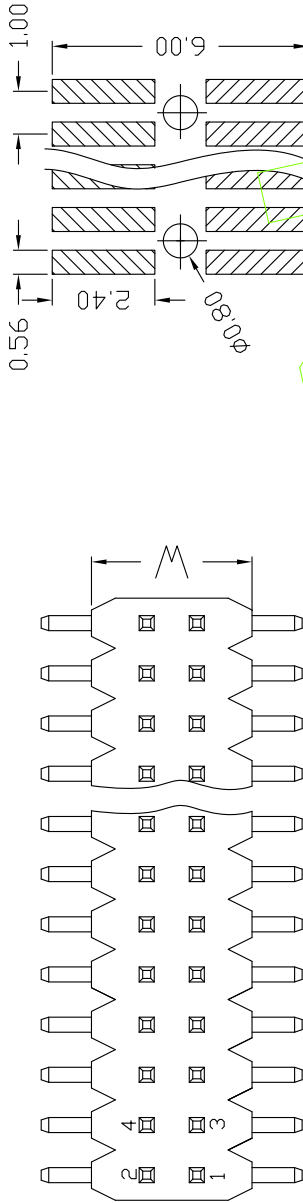

Recommended P.C.B layout

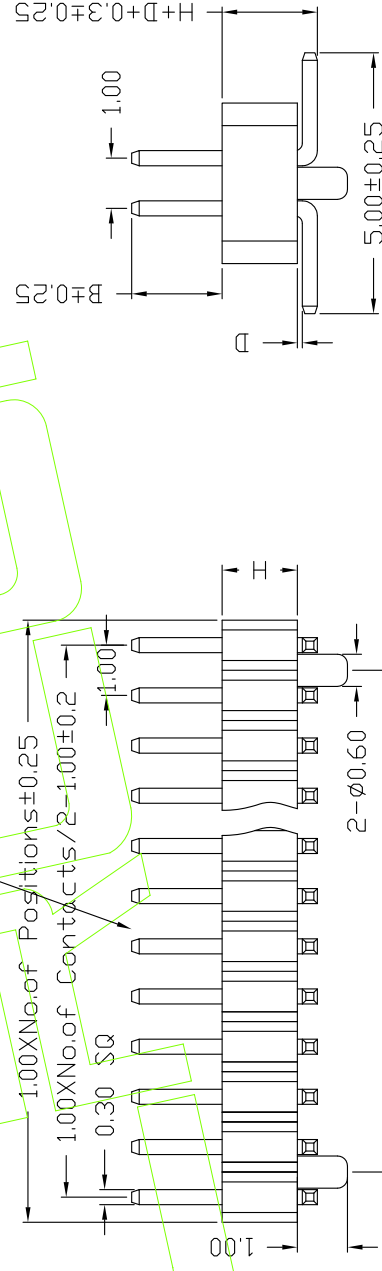

Dimension antitheses list				
ITEM	B	D	H	W
Standard	1.8	0.1	1.0	1.5
Alternate			2.3	3.2

Lrcon		连润电子有限公司		Lrcon Electronics Co.,Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	5PXXM-21XXXXXXX2
A0	12/05/18	NEW		CHECK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE: 1.0双排针 SMT 带柱
				PROJ.	Customer No.

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----