



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 0.75 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information

5PXXM- 12 XX XX X XXX X X△

Plastics Height 10: H=1.0 12: H=1.5 15: H=1.5

No. of Pins 12: 12 15: 15 18: 18

Contact Plating G=Gold Flash H=10" Gold/Tin I=30" Gold/Tin J=50" Gold/Tin K=100" Gold/Tin L=150" Gold/Tin M=300" Gold/Tin N=Fin S=Matte Tin

Insulator Material of Terminal B: PA6T C: PA6T D: LCP

Insulator Length of Terminal B: PA6T C: PA6T D: LCP

Packing A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tape & Reel

A: TYPE A B: TYPE B

C: Tube D: Tray E: Tray F: Tape & Reel

G: Gold Flash H=10" Gold/Tin I=30" Gold/Tin J=50" Gold/Tin K=100" Gold/Tin L=150" Gold/Tin M=300" Gold/Tin N=Fin S=Matte Tin

Insulator Material of Terminal B: PA6T C: PA6T D: LCP

Insulator Length of Terminal B: PA6T C: PA6T D: LCP

Packing A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tape & Reel

A: TYPE A B: TYPE B

C: Tube D: Tray E: Tray F: Tape & Reel

G: Gold Flash H=10" Gold/Tin I=30" Gold/Tin J=50" Gold/Tin K=100" Gold/Tin L=150" Gold/Tin M=300" Gold/Tin N=Fin S=Matte Tin

Insulator Material of Terminal B: PA6T C: PA6T D: LCP

Insulator Length of Terminal B: PA6T C: PA6T D: LCP

Packing A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tape & Reel

A: TYPE A B: TYPE B

C: Tube D: Tray E: Tray F: Tape & Reel

G: Gold Flash H=10" Gold/Tin I=30" Gold/Tin J=50" Gold/Tin K=100" Gold/Tin L=150" Gold/Tin M=300" Gold/Tin N=Fin S=Matte Tin

Insulator Material of Terminal B: PA6T C: PA6T D: LCP

Insulator Length of Terminal B: PA6T C: PA6T D: LCP

Packing A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tape & Reel

A: TYPE A B: TYPE B

C: Tube D: Tray E: Tray F: Tape & Reel

G: Gold Flash H=10" Gold/Tin I=30" Gold/Tin J=50" Gold/Tin K=100" Gold/Tin L=150" Gold/Tin M=300" Gold/Tin N=Fin S=Matte Tin


Insulator Material of Terminal B: PA6T C: PA6T D: LCP

Insulator Length of Terminal B: PA6T C: PA6T D: LCP


Packing A: PE Bag B: Tape & Reel C: Tube D: Tray E: Tray F: Tape & Reel

A: TYPE A B: TYPE B






C: Tube D: Tray E: Tray F: Tape & Reel

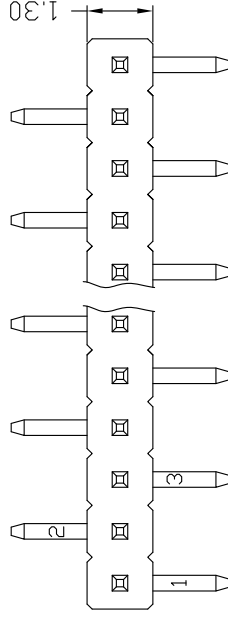


TYPE A

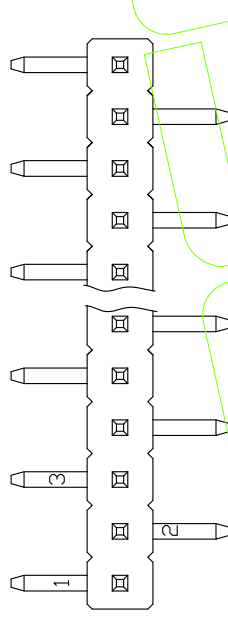




TYPE B

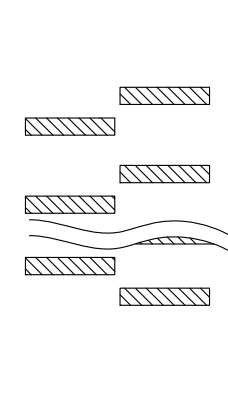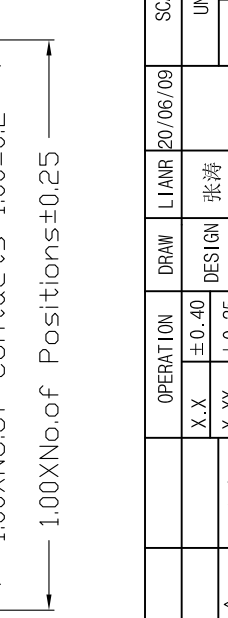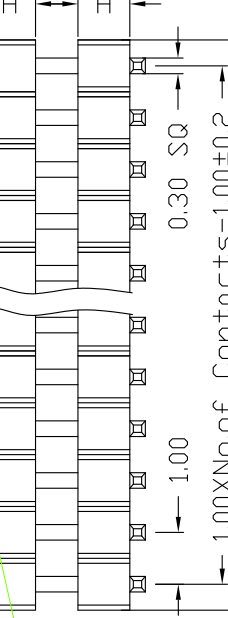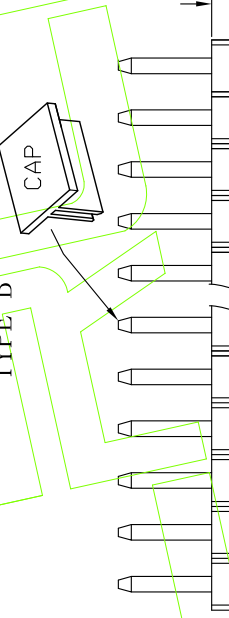

TYPE A

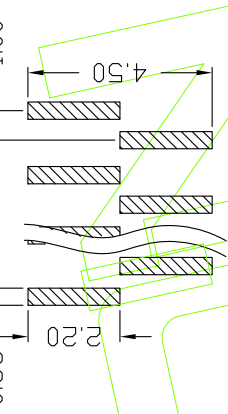




TYPE B

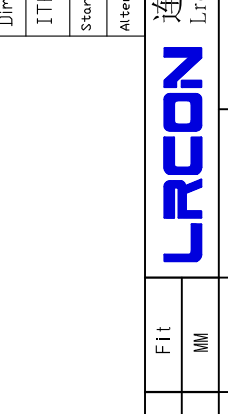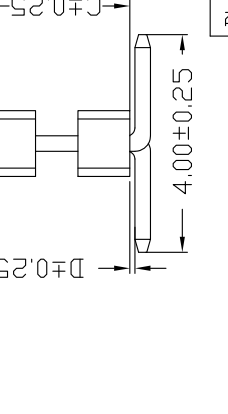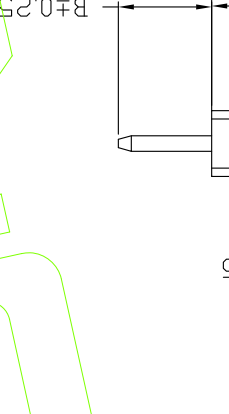

TYPE A



TYPE B



Dimension antitheses list				
ITEM	B	D	H	C
Standard	1.8	0.1	1.0	1.5
Alternate				

Users can customize 此高度可定制				
C	±0.25			
D	±0.25			
H	4.00±0.25			

Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				

Lrcon				
Lrcon Electronics Co., Ltd				
5PXXM-12XXXXXXX				
1.0单排针 双壁 SMT				