

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact : Phosphor bronze

2. 特性 (Characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

6P14Z- 21 XX XX X XXX X 1 Δ

No. of Pins	Contact Plating	Insulator Material	Length	Packing Method
Pz=Low 2 30P	G=Gold Flash G1=10" Gold G2=30" Gold G3=50" Gold G4=100" Gold G5=150" Gold G6=300" Gold F0=Gold Flash F1=10" Gold/Tin F2=30" Gold/Tin F3=50" Gold/Tin F4=100" Gold/Tin F5=150" Gold/Tin F6=300" Gold/Tin Sn=Tin SM=Matte Tin	R=PA6T C=PA9T D=LCP	0° Terminal	A:PE Bag B:Tape & Reel-CAP C:Tube D:Tube-CAP E:Tray F:Tape & Reel

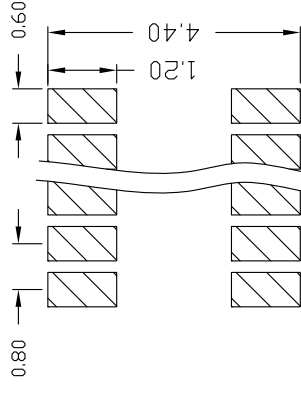

Recommended P.C.B layout

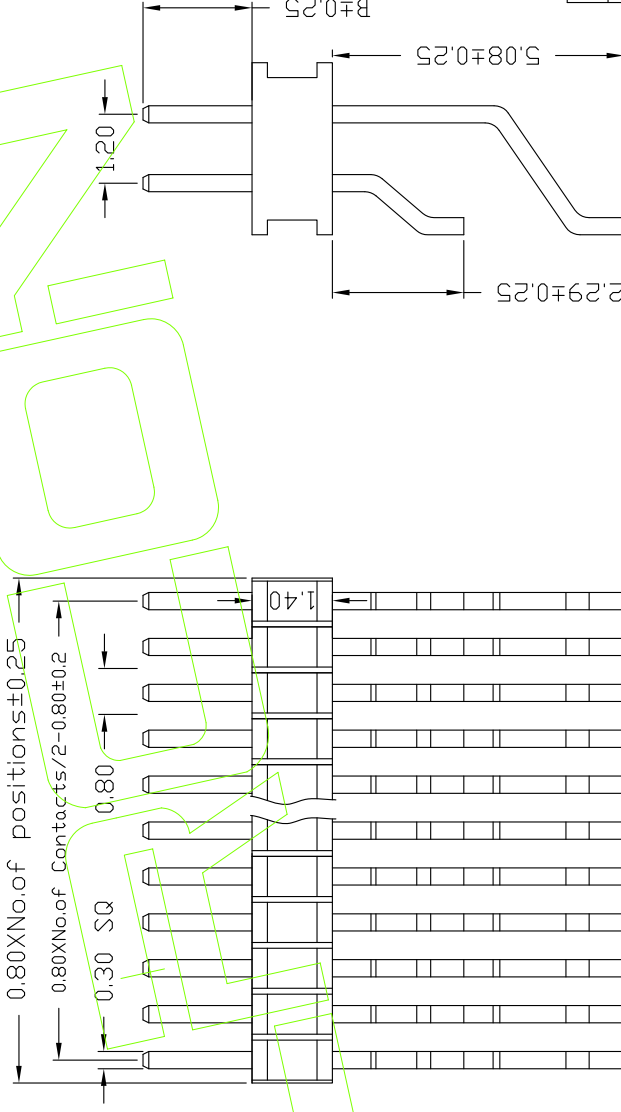

Dimension ontitheses list	
ITEM	B
Standard	1.9 2.8 4.45
Alternate	

LRCON 连润电子有限公司
Lrcon Electronics Co.,Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	APPROVE	罗荣军	CHECK	罗荣军	SIZE	A4	DESIGN	PART NO.	6P14Z-21XXXXXXXXX1
A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛		X.XX	±0.25										
A0	12/05/18	NEW	——	——		X.XXX	±0.15										
					Angle	±3°											