

HSF RoHS



Specifications

备注(Remark)


1. 材料(MATERIAL)
 胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色,
 Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black
 四方针: 黄铜
2. 特性 (characteristics):
 额定电流: 0.75 AMP
 Rating Current: 0.75 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ min.
 Insulating Resistance: 1000 MΩ min.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40℃ to +105℃
 Temperature Range: -40℃ to +105℃

Ordering Information

6P14M-22 XX X XXX X 2^Δ_{A1}

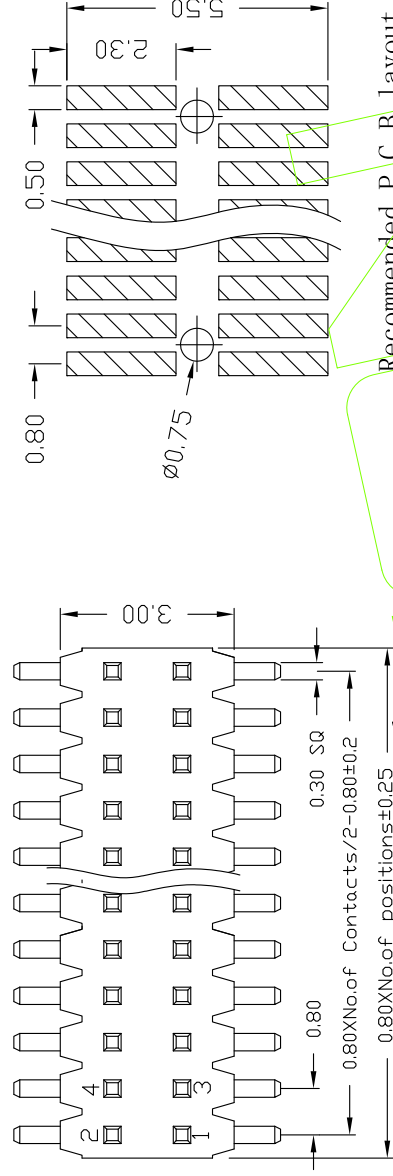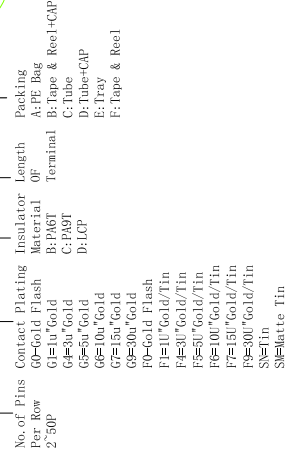

~~Recommended P.C.B. layout~~

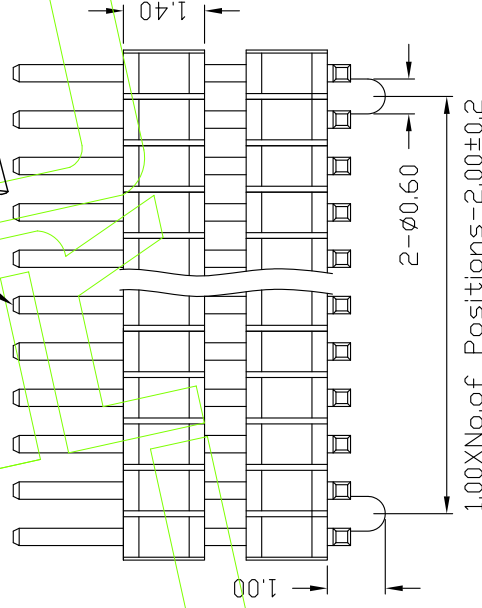

Users can customize
此高度可定制

Dimension antitheses list		
ITEM	B	C
Standard	1.9	2.8 4.45
Alternate		

[illegible]