



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

额定电压: 3 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

3F85C- 21 XX XX X Y X 1 Δ

No. of Pins Per Row	Contact Plating	Insulator Material	Packing
2~40P	G: Gold Flash	D: PA6T	A: PE Bag
	G1=10" Gold	C: PA6T	B: Tape & Reel+CAP
	G2=50" Gold	D: LCP	C: Tube
	G3=100" Gold		D: Tube+CAP
	G4=150" Gold		E: Tray
	G5=300" Gold		F: Tape & Reel
	P0=Gold Flash		
	F1=10" Gold/Tin		
	F2=30" Gold/Tin		
	F3=50" Gold/Tin		
	F4=100" Gold/Tin		
	F5=150" Gold/Tin		
	F6=300" Gold/Tin		
	Sn=Sn		
	Sh=Matte Tin		

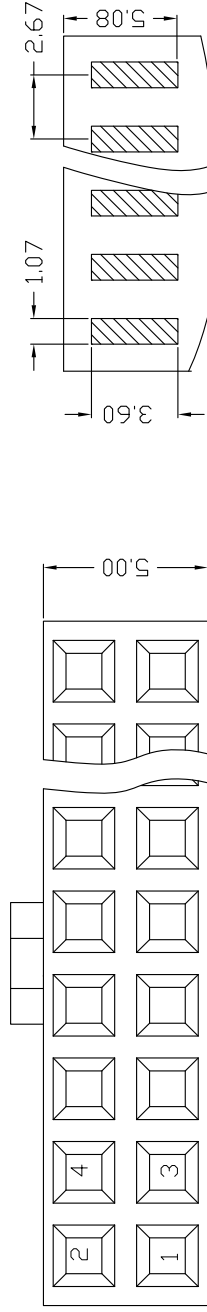

Recommended P.C.B layout

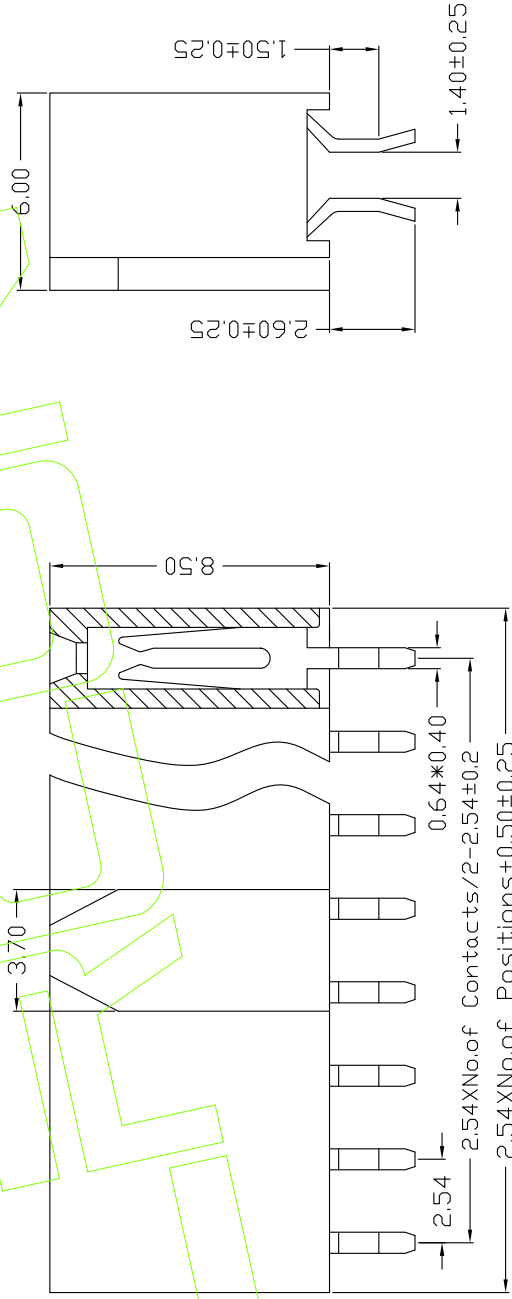

		LIRCON		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	DESIGN	PART NO.	3F85C-21XXXXXX1
A0	12/05/18	NEW	—	—	CHECK	TITLE:	2.54双排母 塑高8.5 Y型 夹板式 带全凸
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.	