



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

3F85M- 11 XX XX X Y X X Δ


No. of Pins
Per Row
1 40P

Contact Plating
G=10" Gold
G=30" Gold
G=50" Gold
G=100" Gold
G=150" Gold
G=300" Gold
F=10" Gold/Tin
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=300" Gold/Tin
Sn= Tin
S= Matte Tin

Insulator
Material
D: PA6T
C: PA9T
D: LCP

Packing
A: Type Bag
B: Tape & Reel+CAP
C: Tube
D: Tube+CAP
E: Tray
F: Tape & Reel

A: TYPE A
B: TYPE B

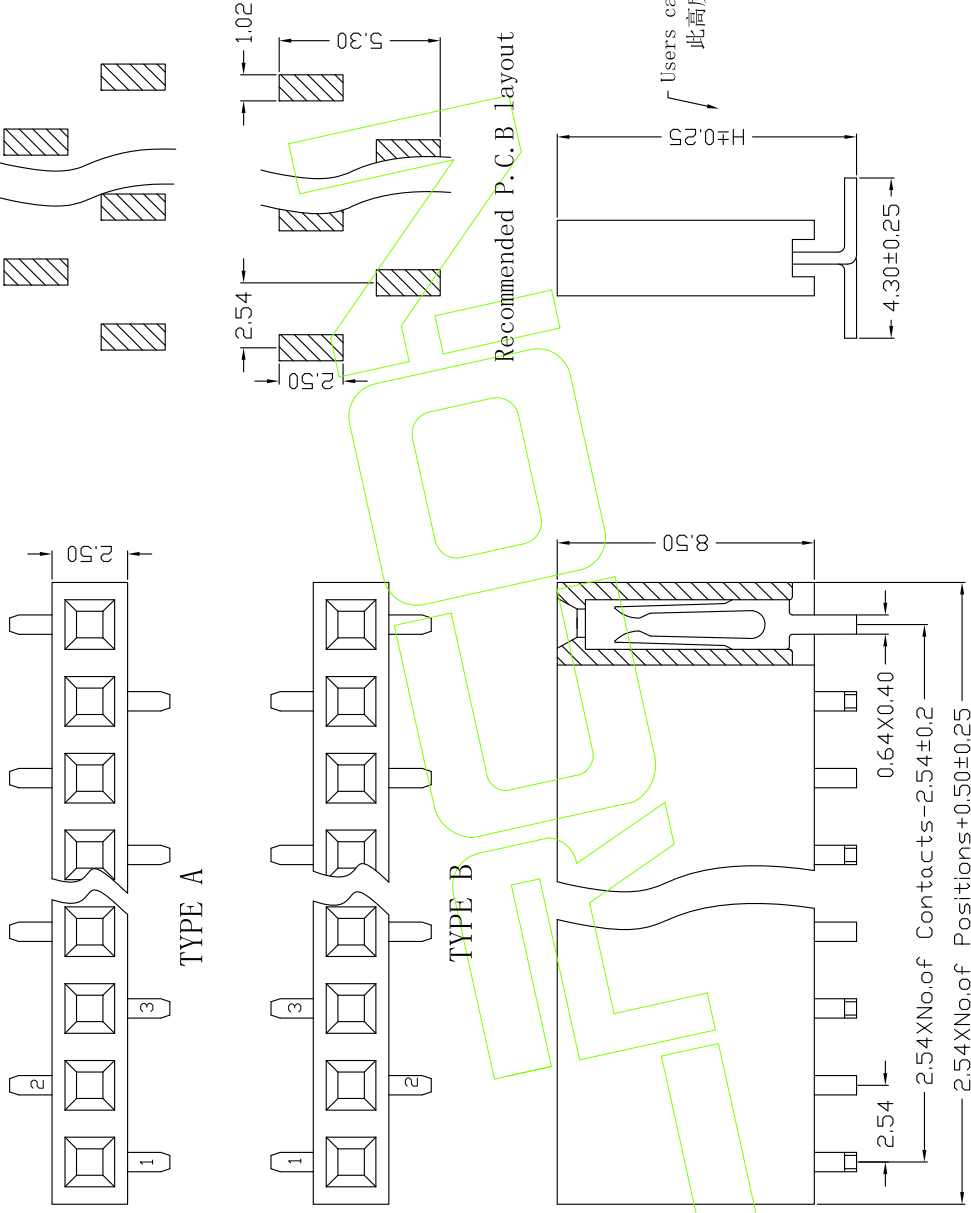

DIM "H"9.90

LARCON

连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	OPERATION		DRAW	LI	ANR	20/06/09	SCALE		Fit	PART NO.				TITLE:	Customer No.
								X.X	±0.40					UNIT	MM		SIZE	A4	DESIGN	3F85M-11XXXXXX		2.54单排母 塑高8.5 Y型 SMT
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛						DESIGN	张涛											
A0	12/05/18	NEW								CHECK	罗荣军											
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Angle	±3°													

10

7

6

5

4

3

2

1