



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

3F85S- 11 XX XX X 0 X 1 Δ

No. of Pins	Contact Plating	Insulator	Packing
Per Row	Material	Material	Material
2~40P	G=Gold	B:PA6T	A:PE Bag
	G=30" Gold	C:PA6T	B: Tape & Reel-CAP
	G=50" Gold	D:LCF	C: Tube
	G=100" Gold		D: Tube-CAP
	G=150" Gold		E: Tray
	G=300" Gold		F: Tape & Reel
	P=Gold Flash		
	F=10" Gold/Tin		
	F=30" Gold/Tin		
	F=50" Gold/Tin		
	F=100" Gold/Tin		
	F=150" Gold/Tin		
	F=300" Gold/Tin		
	Sn=Sn		
	Sn=Matte Tin		

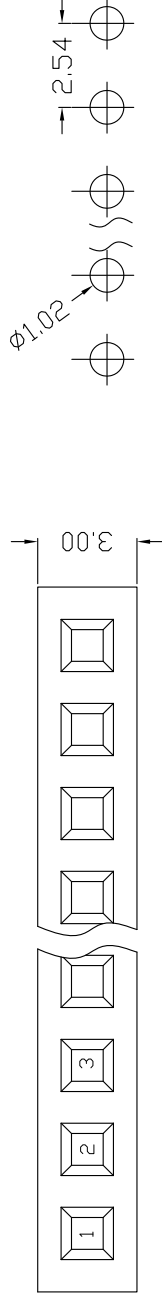

Recommended P.C.B layout

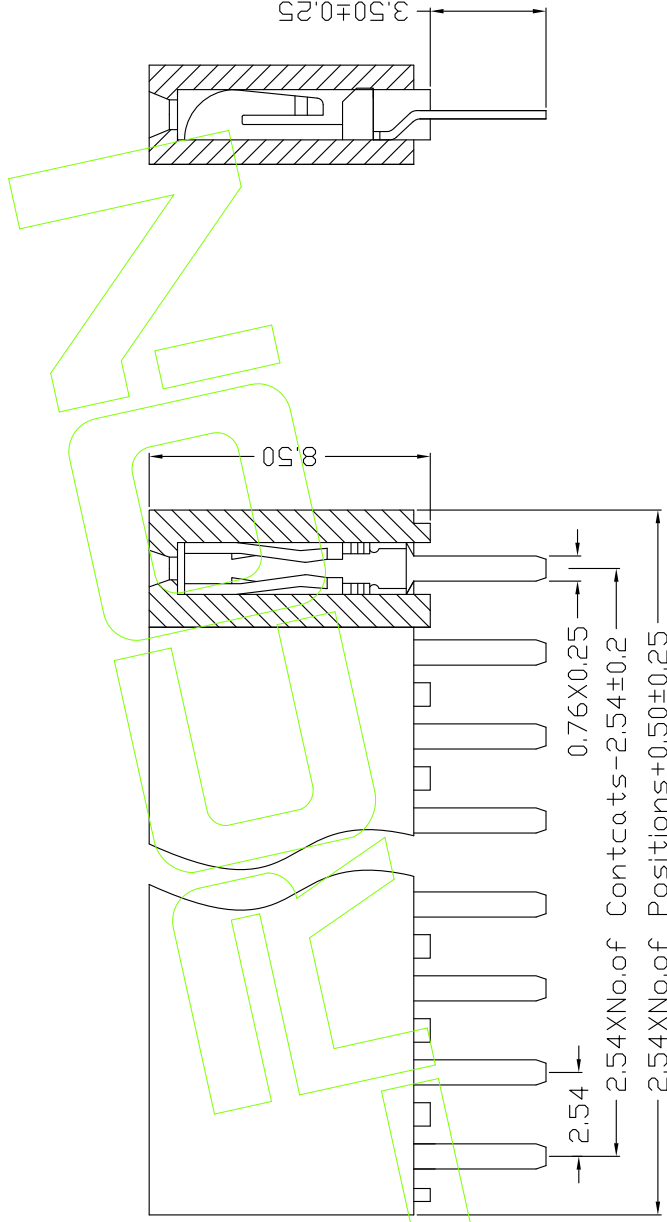

LIRCON 连润电子有限公司
Lircon Electronics Co., Ltd

PART NO.	3F85S-11XXXXX0X1
TITLE:	2.54单排母 塑高8.5 180度 0型
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	OPERATION	DRAW	LI	ANR	20/06/09	SCALE	UNIT	Fit
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	±0.40	±0.25	±0.15	±3°	DESIGN	张涛	张涛	张涛	张涛	MM	MM	
A0	12/05/18	NEW	—	—	—	—	—	—	CHECK	罗荣军	罗荣军	罗荣军	罗荣军	A4	A4	DESIGN
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	OPERATION	DRAW	LI	ANR	20/06/09	SCALE	UNIT	Fit