

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistor

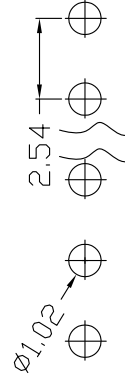
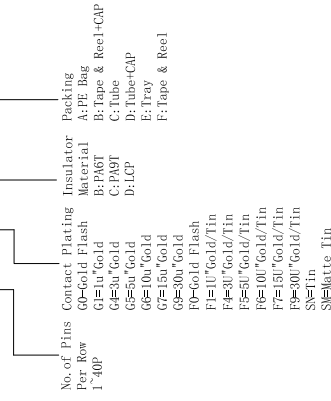
耐电压: AC 500V.

Withstanding Voltage: AC 500V.
温度范围 -40°C to +105°C

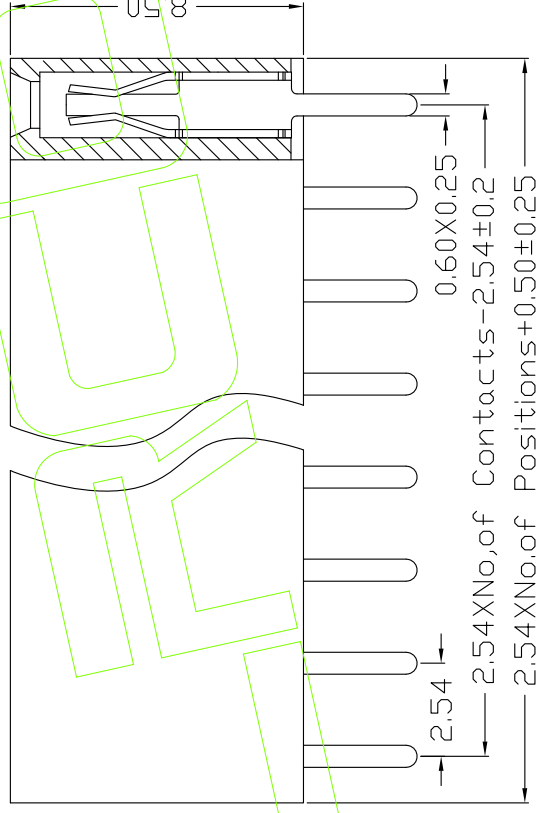
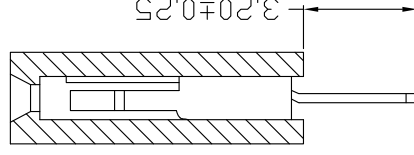
温度范围: -40°C to +105°C
Temperature Range: -40°C

Temperature range: -40 C to +105 C

Ordering Information

3F85S-11 XX XX X U X 1 Δ_{A1} 

Recommended P.C.B layout

[illegible]