

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$


Ordering Information

3F75S-11 XX XX XY X 1 Δ_{A1}

No. of Pins Per Row	Contact	Plating	Insulator Material	Packing
1-40p	G=1u" Gold	Flash	A: PBT	A: PE Bag
	G=3u" Gold		B: PA6T	B: Tape & Reel + CAP
	G=5u" Gold		C: Tube	C: Tube
	G=6u" Gold		D: PA6T	D: Tube + CAP
	G=7.5u" Gold		D: LCP	E: Tray
	G=9u" Gold			F: Tape & Reel
	F0=0u" Gold	Flash		
	F=1u" Gold/Tin			
	F=3u" Gold/Tin			
	F=5u" Gold/Tin			
	F=6u" Gold/Tin			
	F=7.5u" Gold/Tin			
	F=9u" Gold/Tin			
	S=1u" Tin			
	S=3u" Tin			
	S=5u" Tin			

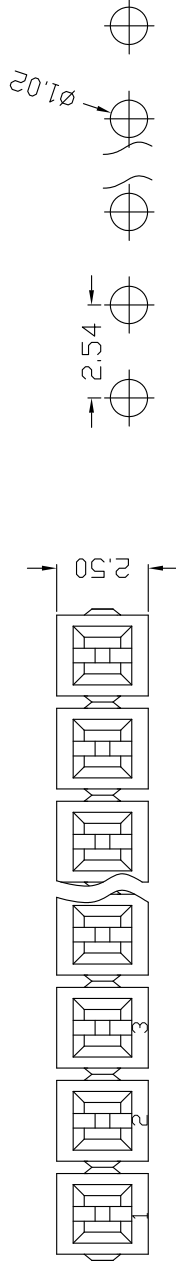

Recommended P.C.B layout

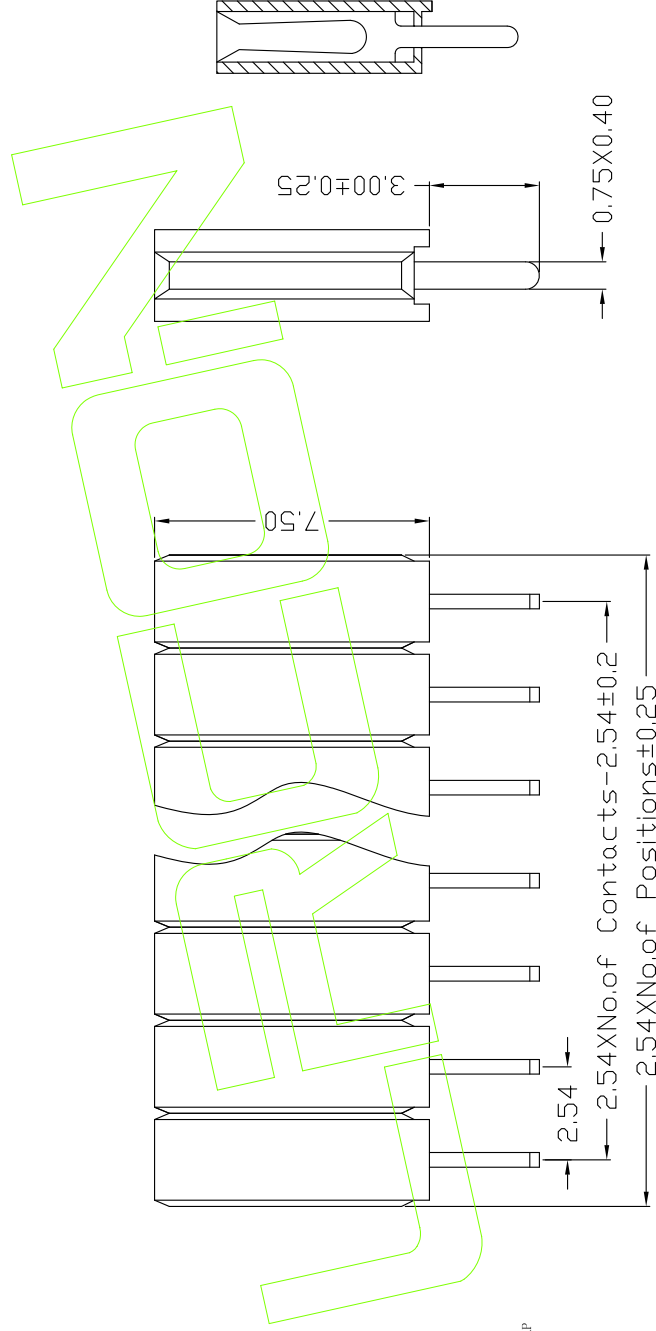

							LIAINR	20/06/09	SCALE	Fit	连润电子有限公司 Lrcon Electronics Co.,Ltd	
						X.X	±0.40	DRAW			MM	
A1	20/06/09	Improve numbering instructions (完整编号请注明)	张涛	△ _{A1}		X.XX	±0.25	DESIGN			UNIT	
A0	12/05/18	NEW	——	——		X.XXX	±0.15	CHECK	罗荣军		SHEET	3F75S-11XXXXXYX1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle	±3°				SIZE A4	PART NO.
											TITLE:	2.54单排母 塑高7.5 Y型 180度
											PROJ.	Customer No.