

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

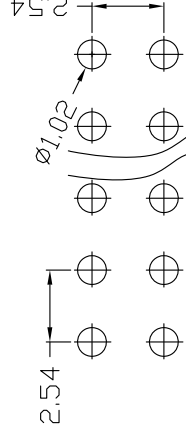
温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

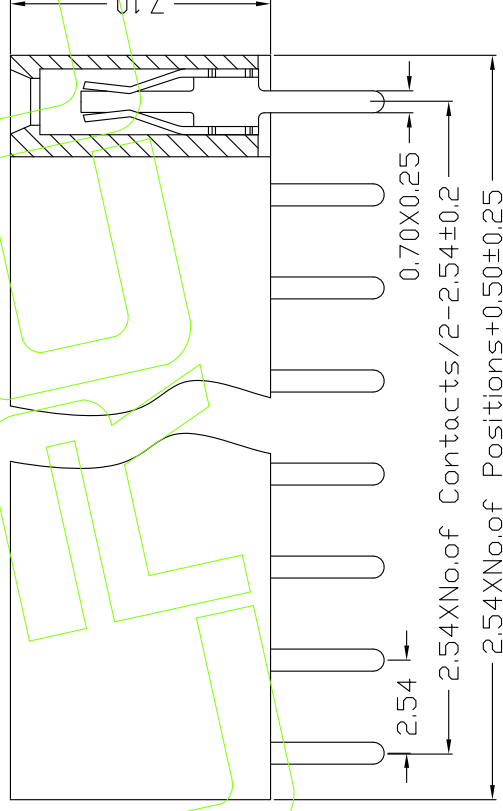
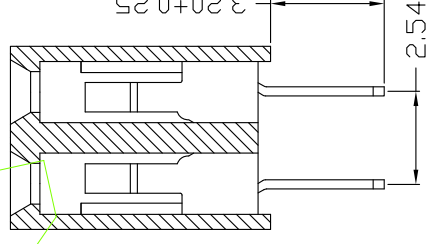
Ordering Information

3F71S- 21 XX XX X U X 1 Δ

No. of Pins Per Row 2/40P	Contact Plating G=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold G4=10u" Gold G5=15u" Gold G6=30u" Gold F0=Gold Flash F1=1u" Gold/Tin F2=3u" Gold/Tin F3=5u" Gold/Tin F4=10u" Gold/Tin F5=15u" Gold/Tin F6=30u" Gold/Tin S=Sn S1=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	--	---	---



Recommended P.C.B layout

Lrcon 连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	张涛	MM	Fit
A0	12/05/18	NEW	张涛	CHECK	罗荣军	A4	DESIGN
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	1/1	CHECK
						PROJ.	Customer No.
						SHEET	TITLE:
						SIZE	3F71S-21XXXXXU1
						UNIT	2.54双排母 塑高7.1 U型 180度