



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

3F68M- 21 XX XX X T X 1 Δ

No. of Pins Per Row 2/40°	Contact Plating G=Gold Flash G1=10" Gold G2=30" Gold G3=50" Gold G4=100" Gold G5=150" Gold G6=300" Gold F=10" Gold/Tin F1=30" Gold/Tin F2=50" Gold/Tin F3=100" Gold/Tin F4=150" Gold/Tin F5=300" Gold/Tin Sn=Sn Sn=Matte Tin	Insulator Material D: PA6T C: PA6T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	---	---	---

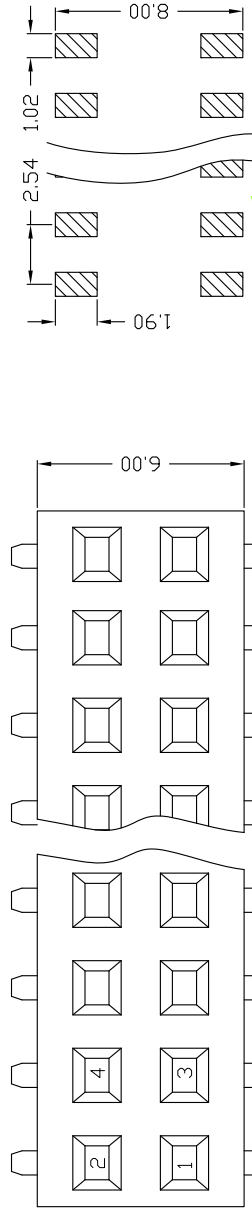

Recommended P. C. B layout

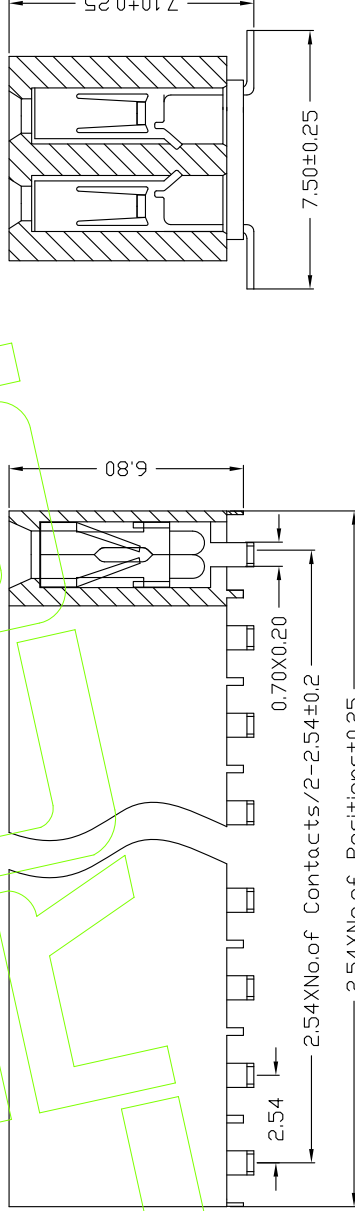

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	3F68M-21XXXXTX1
A0	12/05/18	NEW	罗荣军	CHECK	1/1	2.54双排母 塑高6.8 SMT 下插式
REV	DATE	MODIFICATION DESCRIPTION	APPROVE	PROJ.	CUSTOMER No.	