

## HSF RoHS

## Specifications

备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子:黄铜/磷青铜

Contact : Brass/Phosphor bronze

## 2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗:  $20\text{ m}\Omega\text{ MAX.}$

Contact Resistance: 20

绝缘阻抗: 1000 M $\Omega$  min.

### Insulating Resistance

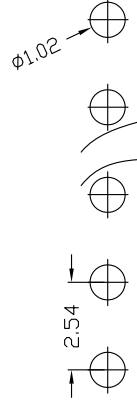
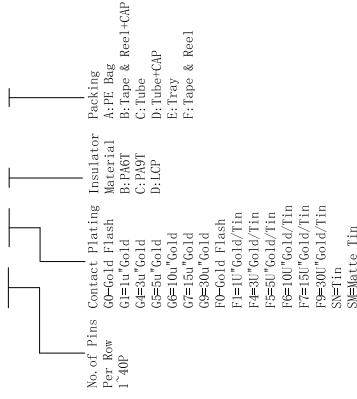
耐压: AC 500V.

Withstanding Voltage: AC 500V.

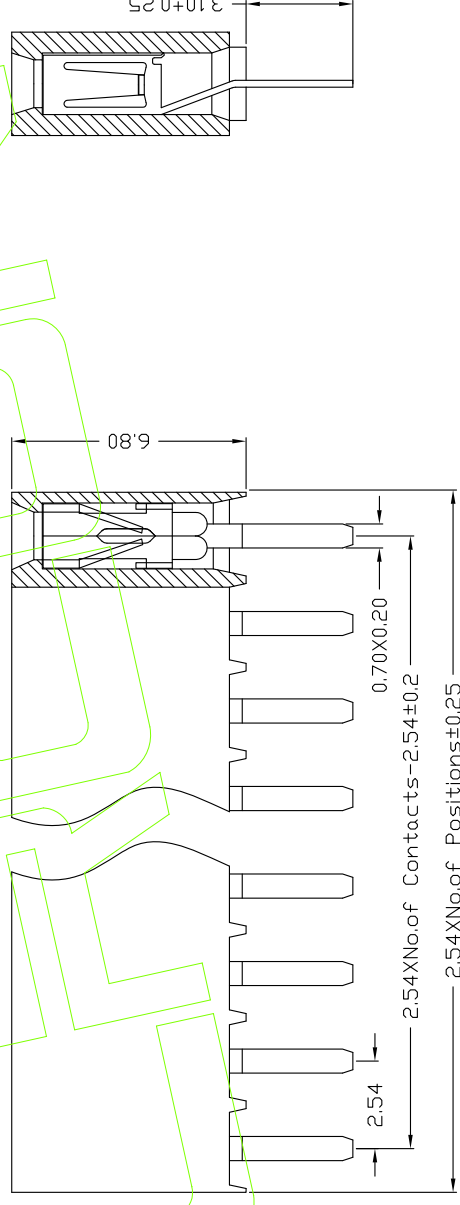

温度范围:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Temperature Range:  $-40^{\circ}\text{C}$ [illegible]

## Ordering Information

3F68S-11 XX XX X T X 1  $\triangle_{A1}$ 

Recommended P.C.B layout

[illegible]