



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

3FXXM- 21 XX XX X Q X 1 Δ

Plastics Light 05:PC, 0mm 08:PE, 8mm	No. of Pins Per Row 2~40	Contact Plating Material G: 1u" Gold H: 3u" Gold I: 5u" Gold J: 10u" Gold K: 15u" Gold L: 30u" Gold M: 50u" Gold N: 100u" Gold O: 150u" Gold P: 300u" Gold Q: 500u" Gold R: 1000u" Gold S: 1500u" Gold T: 3000u" Gold U: 5000u" Gold V: 10000u" Gold W: 15000u" Gold X: 30000u" Gold Y: 50000u" Gold Z: 100000u" Gold	Insulator Material D: PA6T E: PA6T F: PA6T G: PA6T H: PA6T I: PA6T J: PA6T K: PA6T L: PA6T M: PA6T N: PA6T O: PA6T P: PA6T Q: PA6T R: PA6T S: PA6T T: PA6T U: PA6T V: PA6T W: PA6T X: PA6T Y: PA6T Z: PA6T	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---	--------------------------------	--	--	---

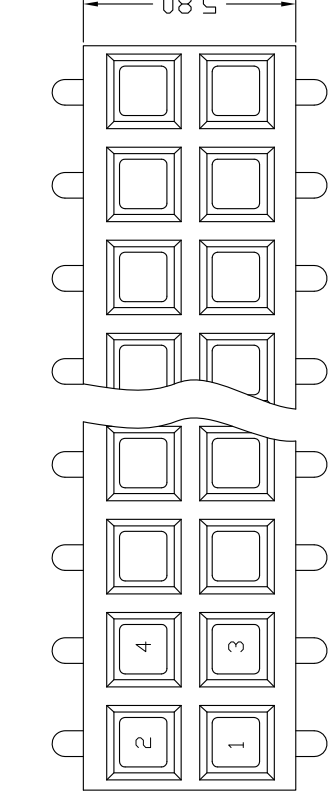

Recommended P.C.B layout

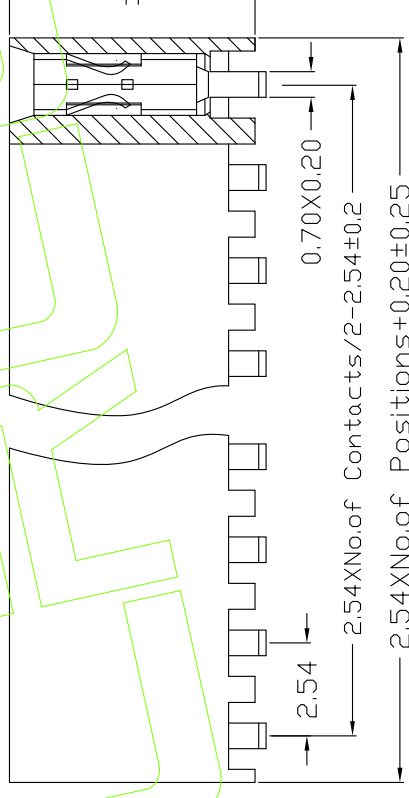

DIM"H" 6.0 6.8

LARCON 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3FXXM-21XXXXXQX1
TITLE:	2.54双排母 SMT 四面包型 上插式
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LIANR	20/06/09	SCALE		Fit
							X.X	±0.40				UNIT	MM	
A1	20/06/09	Improve numbering instructions (完善编号与标注说明)	Δ	张涛	X.XX	±0.25			DESIGN	张涛		A4	DESIGN	
A0	12/05/18	NEW			X.XXX	±0.15			CHECK	罗荣军		1/1	CHECK	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	Angle	±3°	APPROVE	方里军		PROJ.	APPROVE	Customer No.