

HSF RoHS Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40°C to +105°C


Ordering Information

3FXXS-11 XX XX X Q X 1 $\triangle_{A1}$

Plastics	No. of Pins	Contact Plating	Insulator Material	Packing
Height 60:116.0mm	Per Row 2-40P	Gold/Gold Flash	A: PET	A: Tape & Reel B: Tape & Reel + CAP
68:116.8mm		G=1u" Gold G=3u" Gold G=5u" Gold G=10u" Gold G=15u" Gold G=30u" Gold 10-Gold Flash F=1u" Gold/Tin F=3u" Gold/Tin F=5u" Gold/Tin F=10u" Gold/Tin F=15u" Gold/Tin F=30u" Gold/Tin S=1u" Tin S=10u" Tin	B: PBT C: Tube C: PBT D: LCP	C: Tube D: Tube + CAP E: Tray F: Tape & Reel

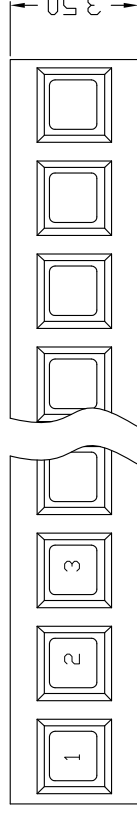

Recommended P.C.B layout

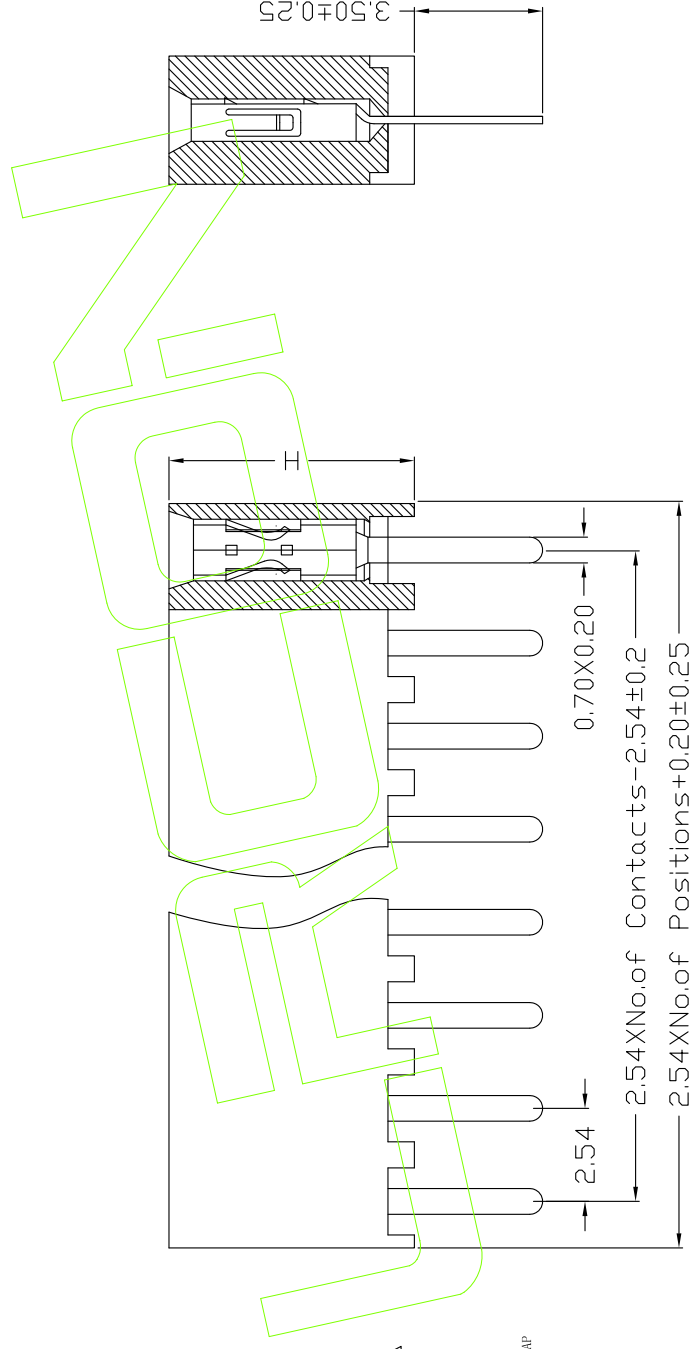

$\frac{8}{5} = \frac{8}{5}$

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX ± 0.25			SHEET	A4	DESIGN	PART NO.	3FXYS-11XXXXXXQ1
A0	12/05/18	NEW	—————	—————	X.XXX ± 0.15 Angle ± 3°	CHECK	罗荣军		1/1	CHECK	TITLE:	2.54单排母 180度 四面包型 上插式
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	